


BIF型(轴端未加工品)

DN值

70000

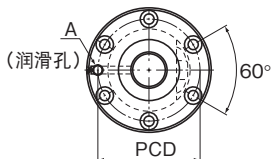

公称型号	滚珠丝杠驱动型							螺母			
	丝杠轴 外 径	导程 Ph	钢球 中心直径 dp	沟槽谷径 dc	负荷 圈数 列×圈	基本额定载荷		外径 D	法兰直径 D ₁	全长 L ₁	螺母 H
						C _a kN	C _{0a} kN				
d	Ph	dp	dc	列×圈	C _a kN	C _{0a} kN	D	D ₁	L ₁	H	
BIF 3206-5 BIF 3206-10	32	6	33	28.4	1×2.5 2×2.5	13.9 25.2	35.2 70.4	62	89	63 99	12
BIF 3210A-5	32	10	33.75	26.4	1×2.5	26.1	56.2	74	108	100	15
BIF 3610-5 BIF 3610-10	36	10	37.75	30.5	1×2.5 2×2.5	27.6 50.1	63.3 126.4	75	120	111 171	18

公称型号的构成例

BIF3206-10 RR G0 +1100L C5 B

公称型号

轴向间隙标记(※2)

精度标记(※3)


轴端未加工品标记(A或者B)

密封圈标记(※1)

丝杠轴总长度(单位mm)

(※1)参照A15-380。(※2)参照A15-19。(※3)参照A15-12。

轴端未加工品精密滚珠丝杠

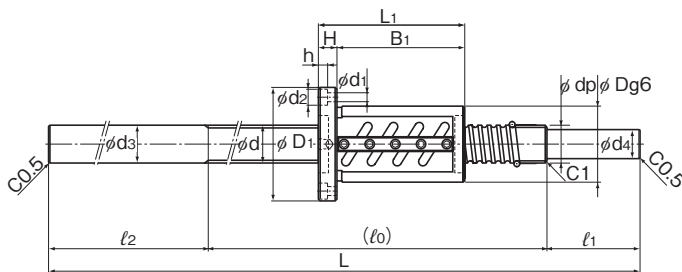

单位：mm

尺寸						丝杠轴尺寸							螺母质量 kg	轴质量 kg/m	容许转速 min ⁻¹			
B ₁	PCD	d ₁	d ₂	h	润滑孔 A	轴端未加工 标记	全长 L	l ₀	l ₁	l ₂	d ₃	d ₄						
51 87	75	6.6	11	6.5	M6	A	730	500	70	160	32	25.3	1.2 1.76	4.63	2120			
							930	700										
							1230	1000										
							1430	1200										
						1630	1400	70	360	32	27.8							
						1830	1600											
						930	500					70				330	32	27.8
						1100	700											
1430	1000	360																
85	90	9	14	8.5	M6	A	730	500	70	160	32	25.3	2.8	3.66	2070			
							930	700										
							1430	1200										
							1830	1600										
93 153	98	11	17.5	11	M6	A	730	500	70	160	36	30.3	3.4 4.8	5.03	1850			
							930	700										
							1430	1200										
							1830	1600										
						930	500	100	330	300	530							
												1100				700		
												1830				1200		

滚珠丝杠