


SDA-V/SDA-VZ With Preload/No Preload

DN value	SDA-V (With Retainer)	160000
	SDA-VZ (Full-Ball)	100000

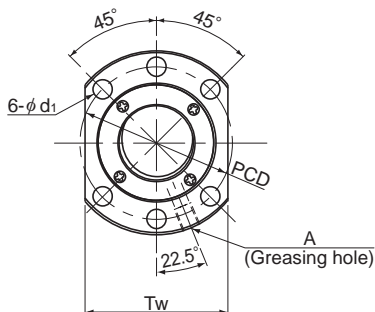


Model No.	Screw shaft outer diameter d	Lead Ph	Ball center-to-center diameter dp	Screw shaft Thread minor diameter dc	No. of loaded circuits Rows X turns	Basic load rating				Rigidity	
						SDA-V (With Retainer)		SDA-VZ (Full-Ball)		SDA-V (With Retainer)	SDA-VZ (Full-Ball)
						Ca kN	C _{0a} kN	Ca kN	C _{0a} kN	K N/μm	K N/μm
SDA 2004V-4	20	4	20.5	18.1	1×4	8.8	14.7	8.3	16.2	239	260
SDA 2005V-3	20	5	20.75	17.1	1×3	11.7	17.7	11.1	18.9	200	213
SDA 2010V-3	20	10	20.75	17.1	1×3	11.6	17.7	11	19	200	213
SDA 2020V-3	20	20	20.75	17.1	1×3	11.4	17.2	10.8	18.5	203	217
SDA 2030V-2	20	30	20.75	17.1	1×2	7.4	11.5	7	12.3	135	143
SDA 2040V-2	20	40	20.75	17.1	1×2	7.1	9.7	6.8	10.4	137	147
SDA 2505V-3	25	5	25.75	22.1	1×3	12.9	22	12.3	23.7	237	254
SDA 2510V-3	25	10	25.75	22.1	1×3	12.8	22	12.2	23.8	237	254
SDA 2520V-3	25	20	25.75	22.1	1×3	12.7	21.3	12.1	22.9	241	257
SDA 2525V-3	25	25	25.75	22.1	1×3	12.5	21.6	11.9	23.3	243	259
SDA 2530V-2	25	30	25.75	22.1	1×2	8.3	13.9	7.9	14.9	158	168
SDA 2550V-2	25	50	25.75	22.1	1×2	7.8	12.1	7.5	13.1	163	176

Model number coding

SDA2005V Z -3 TT G0 +830L C5

Model No. Full-Ball type code (No code for retainer type)	Number of turns Contamination protection accessory symbol (*1)	Overall screw shaft length (in mm) Axial direction clearance code (*2) (Preloaded products: GO Clearance, Non-preloaded products: GT Clearance)	Accuracy symbol (*3)
--	---	--	----------------------

(*1) See **A15-308**. (*2) See **A15-19**. (*3) See **A15-12**.

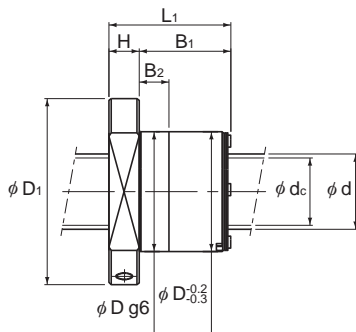

Unit: mm

Nut dimensions											Screw shaft inertial moment/mm	Nut mass	Shaft mass	Permissible Rotational Speed	
Outer diameter	Flange diameter	Overall length							Greasing hole					kg•m ² /mm	kg
D	D ₁	L ₁	H	B ₁	B ₂	PCD	d ₁	T _w	A					min ⁻¹	min ⁻¹
32	58	27	10	17	13.8	47	6.6	44	M6		1.23×10^{-7}	0.17	2.27	5000	4870
36	58	27	10	17	13.5	47	6.6	44	M6		1.23×10^{-7}	0.18	2.21	5000	4810
36	58	40	10	30	27	47	6.6	44	M6		1.23×10^{-7}	0.25	2.34	5000	4810
36	58	67	10	57	20	47	6.6	44	M6		1.23×10^{-7}	0.39	2.4	5000	4810
36	58	66	10	56	20	47	6.6	44	M6		1.23×10^{-7}	0.38	2.42	5000	4810
36	58	84	10	74	20	47	6.6	44	M6		1.23×10^{-7}	0.47	2.43	5000	4810
40	62	27	10	17	13.5	51	6.6	48	M6		3.01×10^{-7}	0.2	3.53	5000	3880
40	62	40	10	30	27	51	6.6	48	M6		3.01×10^{-7}	0.28	3.7	5000	3880
40	62	67	10	57	20	51	6.6	48	M6		3.01×10^{-7}	0.42	3.78	5000	3880
40	62	82	10	72	20	51	6.6	48	M6		3.01×10^{-7}	0.5	3.79	5000	3880
40	62	66	10	56	20	51	6.6	48	M6		3.01×10^{-7}	0.41	3.8	5000	3880
40	62	102	10	92	20	51	6.6	48	M6		3.01×10^{-7}	0.61	3.83	5000	3880

Axial Clearance

Unit: mm

Clearance symbol	G0	GT
Axial Clearance	0 or less	0 to 0.005

Note) The overall length of the nut will increase when equipping the QZ lubricating device. See **A15-318** for further details. It is not possible to chamfer both ends of the screw shaft. When designing your system this way, contact THK.

The rigidity values (K) in the table represent spring constants, each obtained from the load and the elastic deformation under an axial load equal to 30% of the basic axial dynamic load rating (Ca).

These values do not include the rigidity of the components related to mounting the ball screw nut. Therefore, it is normally appropriate to regard roughly 80% of the rigidity value (K) in the table as the actual value.

If the axial load (Fa) is not 0.3 Ca, the rigidity value (K_v) is obtained from the following equation.

$$K_v = K \left(\frac{F_a}{0.3 C_a} \right)^{\frac{1}{3}}$$

K: Rigidity value in the dimensional table.