


BNK1004-2.5 Shaft Diameter: 10; Lead: 4

DN value


70,000

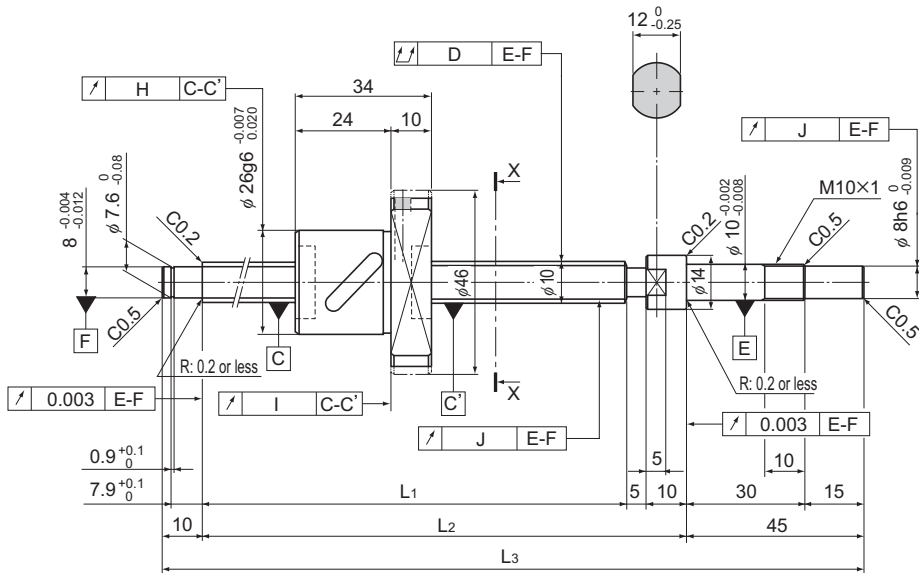

Model No.	Stroke	Screw shaft length		
		L ₁	L ₂	L ₃
BNK 1004-2.5RRG0+180LC3Y	50	110	125	180
BNK 1004-2.5RRG0+180LC5Y				
BNK 1004-2.5RRG2+180LC7Y				
BNK 1004-2.5RRG0+230LC3Y	100	160	175	230
BNK 1004-2.5RRG0+230LC5Y				
BNK 1004-2.5RRG2+230LC7Y				
BNK 1004-2.5RRG0+280LC3Y	150	210	225	280
BNK 1004-2.5RRG0+280LC5Y				
BNK 1004-2.5RRG2+280LC7Y				
BNK 1004-2.5RRG0+330LC3Y	200	260	275	330
BNK 1004-2.5RRG0+330LC5Y				
BNK 1004-2.5RRG2+330LC7Y				
BNK 1004-2.5RRG0+380LC3Y	250	310	325	380
BNK 1004-2.5RRG0+380LC5Y				
BNK 1004-2.5RRG2+380LC7Y				

Note: For accuracy grades C3 and C5, GT clearance is also available as standard.

Positioning Ball Screw

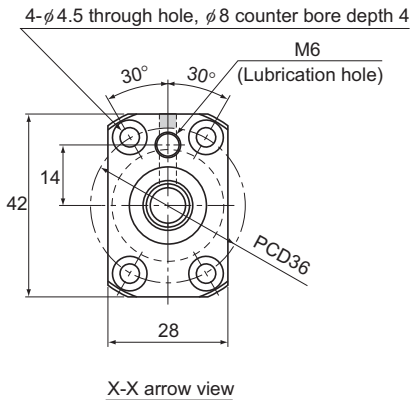

Ball screw specifications			
Lead (mm)	4		
BCD (mm)	10.5		
Thread minor diameter (mm)	7.8		
Threading direction, No. of threaded grooves	Rightward, 1		
No. of circuits	2.5 turns \times 1 row		
Clearance symbol	G0	GT	G2
Axial clearance (mm)	0	0.005 or less	0.02 or less
Basic dynamic load rating C_a (kN)	2.1	3.4	3.4
Basic static load rating C_{0a} (kN)	2.7	5.4	5.4
Preload torque (N·m)	9.8×10^3 to 4.9×10^2	—	—
Spacer ball	1 : 1	None	None
Rigidity value (N/ μ m)	50	100	
Circulation method	Return pipe		

Unit: mm

	Runout of the screw shaft axis D	Runout of the nut circumference H	Flange mounting surface runout I	Runout of the thread groove surface J	Lead angle accuracy		Nut mass kg	Shaft mass kg/m	Permissible rotational speed min ⁻¹
					Representative travel distance error	Fluctuation			
	0.02	0.009	0.008	0.008	± 0.01	0.008	0.15	0.32	5,000
	0.035	0.012	0.01	0.011	± 0.02	0.018	0.15	0.32	5,000
	0.04	0.02	0.014	0.014	Travel distance: $\pm 0.05/300$		0.15	0.32	5,000
	0.03	0.009	0.008	0.008	± 0.01	0.008	0.15	0.32	5,000
	0.04	0.012	0.01	0.011	± 0.02	0.018	0.15	0.32	5,000
	0.055	0.02	0.014	0.014	Travel distance: $\pm 0.05/300$		0.15	0.32	5,000
	0.03	0.009	0.008	0.008	± 0.012	0.008	0.15	0.32	5,000
	0.04	0.012	0.01	0.011	± 0.023	0.018	0.15	0.32	5,000
	0.055	0.02	0.014	0.014	Travel distance: $\pm 0.05/300$		0.15	0.32	5,000
	0.04	0.009	0.008	0.008	± 0.012	0.008	0.15	0.32	5,000
	0.05	0.012	0.01	0.011	± 0.023	0.018	0.15	0.32	5,000
	0.065	0.02	0.014	0.014	Travel distance: $\pm 0.05/300$		0.15	0.32	5,000
	0.04	0.009	0.008	0.008	± 0.012	0.008	0.15	0.32	5,000
	0.05	0.012	0.01	0.011	± 0.023	0.018	0.15	0.32	5,000
	0.065	0.02	0.014	0.014	Travel distance: $\pm 0.05/300$		0.15	0.32	5,000