



Slide Rail

THK General Catalog

A Product Descriptions

Features and Types	A13-2
Features of the Slide Rail	A13-2
▪ Structure and Features	A13-2
Slide Rail Types	A13-3
▪ Types and Features	A13-3
Classification Table for Slide Rails	A13-12

Dimensional Drawing, Dimensional Table	
Model FBL 27S	A13-14
Model FBL 27S-P14	A13-15
Model FBL 35S	A13-16
Model FBL 35S-P13	A13-17
Model FBL 35S-P14	A13-18
Model FBL 35M	A13-19
Model FBL 35J	A13-20
Model FBL 35B	A13-21
Model FBL 27D	A13-22
Model FBL 35N	A13-24
Model FBL 35N-P16	A13-25
Model FBL 35G-P13	A13-26
Model FBL 35G-P14	A13-27
Model FBL 35D	A13-28
Model FBL 51H	A13-29
Model FBL 51H-P13	A13-30
Model FBL 51H-P14	A13-31
Model FBL 35K	A13-32
Model FBL 56H	A13-33
Model FBL 56H-P13	A13-34
Model FBL 56H-P14	A13-35
Model FBL 35F	A13-36
Model FBL 48DR	A13-37
Model E36RS	A13-38
Model E15	A13-40
Model E20	A13-41
Model D20	A13-42

Point of Design	A13-43
------------------------------	--------

Model No.	A13-45
▪ Model Number Coding	A13-45

Precautions on Use	A13-47
---------------------------------	--------

B Support Book (Separate)

Features and Types	B13-2
Features of the Slide Rail	B13-2
▪ Structure and Features	B13-2
Slide Rail Types	B13-3
▪ Types and Features	B13-3
Classification Table for Slide Rails	B13-12

Mounting Procedure	B13-14
Mounting the Slide Rail.....	B13-14

Model No.	B13-17
▪ Model Number Coding	B13-17

Precautions on Use	B13-19
---------------------------------	--------

Features of the Slide Rail

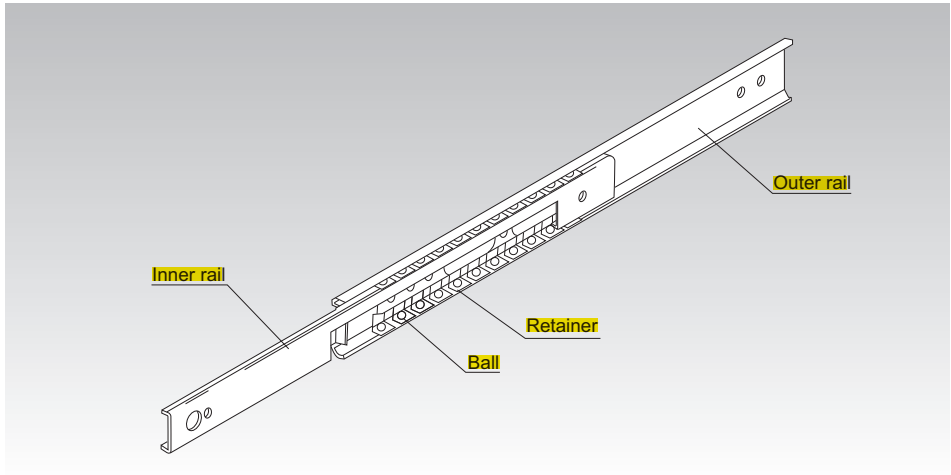


Fig.1 Structure of Slide Rail Model FBL

Structure and Features

Slide rails are low-price finite linear guides made out of precision roll-formed steel plates. Suitable for various purposes because they are thin, compact, and easy to mount. Slide rails can be used in a wide range of applications such as photocopiers, measuring instruments, telecommunications equipment, medical equipment, automatic vending machines, and various types of office equipment.

The Model FBL slide rail has two rows of ball bearings placed between an inner rail and an outer rail that have been roll-formed out of steel plates. The ball bearings are evenly spaced by a precisely press-molded retainer, eliminating friction between the bearings and achieving a smooth sliding mechanism.

[Allows Easy Installation]

Simple to mount on the mounting surface. Since retainers hold the bearings, they do not fall out even if the inner rail is removed.

[Thin and Compact]

The thin cross section of the Model FBL slide rail means it can be installed in small spaces, and it is suitable for places where space saving is required.

[High Corrosion Resistance]

The Model FBL slide rail is treated with zinc plating, and models E and D are treated with a white anodized aluminum coating, making them highly corrosion-resistant.

Slide Rail Types


Types and Features

[Single Slides for Light Load]

Model FBL 27S

The most compact slide rail.

Specification Table⇒ **A13-14**

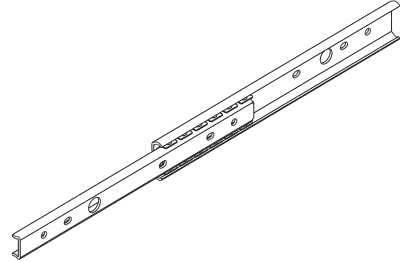


Model FBL 27S

Model FBL 27S-P14

The Model FBL 27S features a removable inner rail. When retracted, the inner rail can be automatically unlocked by pushing it further into the outer rail.

Specification Table⇒ **A13-15**

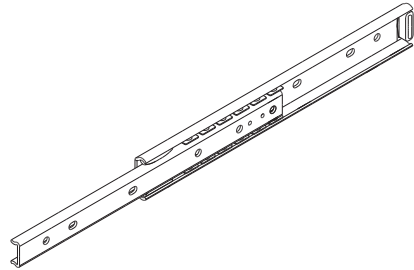


Model FBL 27S-P14

Model FBL 35S

A single slide type of slide rail with the most fundamental shape.

Specification Table⇒ **A13-16**

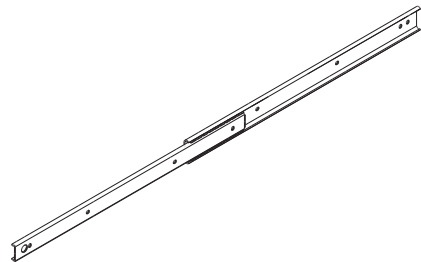


Model FBL 35S

Model FBL 35S-P13

Specification Table⇒A13-17

The Model FBL 35S features a removable inner rail. When retracted, it can be unlocked manually.

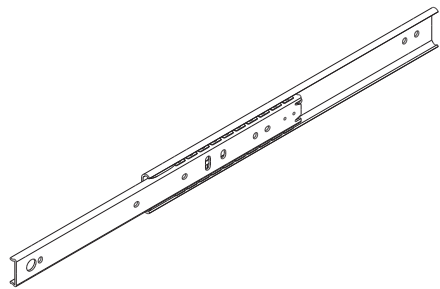


Model FBL 35S-P13

Model FBL 35S-P14

Specification Table⇒A13-18

The Model FBL 35S features a removable inner rail. When retracted, the inner rail can be automatically unlocked by pushing it further into the outer rail.

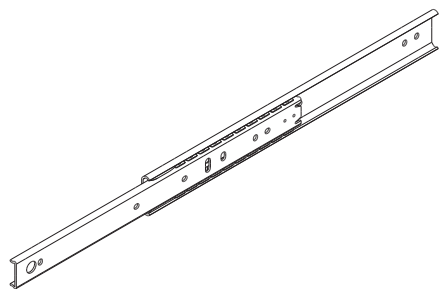


Model FBL 35S-P14

Model FBL 35M

Specification Table⇒A13-19

The Model FBL 35S features a removable inner rail. The slide rail is designed to stop by frictional resistance when it is fully opened. Remove the inner rail by applying more force. (Includes a brake stop)

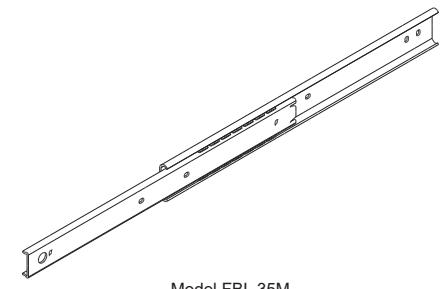


Model FBL 35M

Model FBL 35J

Specification Table⇒**A** 13-20

The Model FBL 35M with additional lead ball that serves as a guide when the inner rail is inserted.

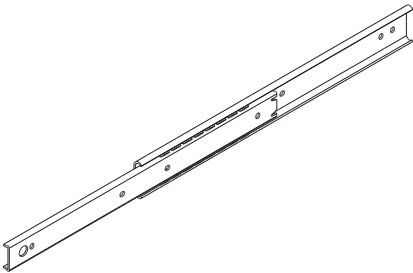


Model FBL 35J

Model FBL 35B

Specification Table⇒**A** 13-21

The Model FBL 35M with additional mounting bracket.

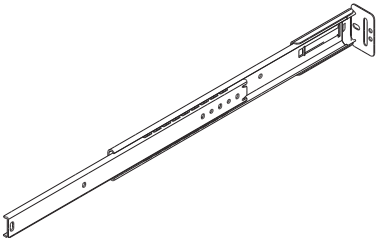


Model FBL 35B

[Double Slides for Light Load]

Model FBL 27D

Specification Table⇒ **A13-22**

A double slide with an additional Model FBL 27S attached on the rear side of the inner rail. Widely used in many types of OA equipment.



Model FBL 27D

Model FBL 35N

Specification Table⇒ **A13-24**

This is a three-rail double slide that allows a long stroke in a small space.

This product uses a plate thickness of 1.2 mm and a light-load double slide rail to achieve weight reduction.




Model FBL 35N

Model FBL 35N-P16

Specification Table⇒ **A13-25**

This is a three-rail double slide that allows a long stroke in a small space. It uses a plate thickness of 1.2 mm and a light-load double slide rail to achieve weight reduction. The inner rail can be pulled out, and it can be reinserted smoothly without the need for a release operation.

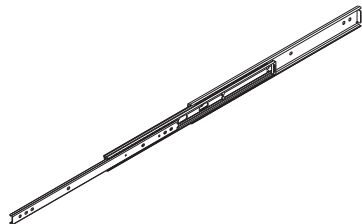


Model FBL 35N-P16

[Double Slides for Medium Load]**Model FBL 35G-P13**

A double slide with an additional Model FBL 35S attached on the front side. The drawer rail can be pulled out, and it can be manually unlocked when retracted. It is also equipped with a useful locking mechanism that engages when the slide rail is fully opened.

Specification Table⇒ **A 13-26**




Model FBL 35G-P13

Model FBL 35G-P14

A double slide with an additional Model FBL 35S attached on the front side. The drawer rail can be pulled out, and it can be automatically unlocked by pushing it further into the outer rail. It is also equipped with a useful locking mechanism that engages when the slide rail is fully opened.

Specification Table⇒ **A 13-27**




Model FBL 35G-P14

Model FBL 35D

A double slide with an additional Model FBL 35S attached on the rear side of the inner rail. Widely used in a number of different industries.

Specification Table⇒ **A 13-28**




Model FBL 35D

Model FBL 51H

Specification Table⇒A13-29

A three-rail double slide that allows a long stroke. A thin model that can be used in small spaces, even with large working loads.

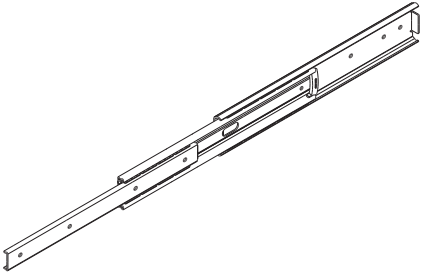


Model FBL 51H

Model FBL 51H-P13

Specification Table⇒A13-30

A three-rail double slide that allows a long stroke. A thin model that can be used in small spaces, even with large working loads. The inner rail can be pulled out, and locked states caused by the disconnection spring can be manually released when retracted. It is also equipped with a useful locking mechanism that engages when the slide rail is fully opened.

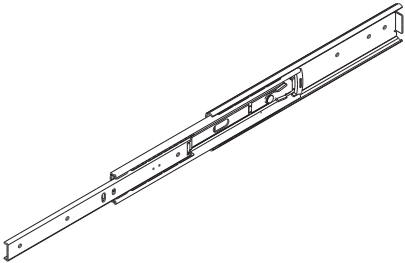


Model FBL 51H-P13

Model FBL 51H-P14

Specification Table⇒A13-31

A three-rail double slide that allows a long stroke. A thin model that can be used in small spaces, even with large working loads. The inner rail can be pulled out, and it can be automatically unlocked by pushing it further into the outer rail.

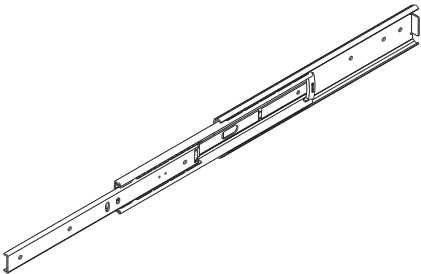


Model FBL 51H-P14

[Double Slides for Heavy Load]

Model FBL 35K

A double slide combining four Model FBL 35S units. It features the largest allowable load among all models, making it suitable for opening/closing heavy objects.

Specification Table⇒ **A13-32**




Model FBL 35K

Model FBL 56H

Three-rail double slide with a large allowable load. Widely used in many types of office furniture.

Specification Table⇒ **A13-33**




Model FBL 56H

Model FBL 56H-P13

Three-rail double slide with a large allowable load. The inner rail can be pulled out, and it can be manually unlocked when retracted. It is also equipped with a useful locking mechanism that engages when the slide rail is fully opened.

Specification Table⇒ **A13-34**




Model FBL 56H-P13

Model FBL 56H-P14

Three-rail double slide with a large allowable load. The inner rail can be pulled out, and it can be automatically unlocked by pushing it further into the outer rail.

Specification Table⇒ **A13-35**




Model FBL 56H-P14

[Linear Type Slides]

Light Load Type Model FBL 35F

Specification Table⇒A13-36

Linear-type slide suitable for limited straight motion, featuring a flange for easy mounting.



Light Load Type Model FBL 35F

Heavy Load Type Model FBL 48DR

Specification Table⇒A13-37

A heavy-load, low-friction linear-type slide, developed for sliding heavy doors.




Heavy Load Type Model FBL 48DR

[Wheel-type Linear Slide]

Model E36RS

Specification Table⇒A13-38

A linear slide that features wear-resistant resin bearings.




Model E36RS

[Aluminum Alloy Slide Rail]

Light Load Type Model E15

Specification Table⇒A13-40

A compact and lightweight single slide from the aluminum alloy series. Suitable for locations within magnetic fields, locations requiring rust-resistant materials, and locations where appearance is a factor.

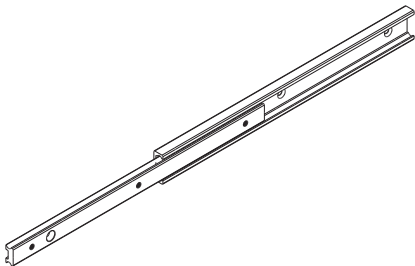


Light Load Type Model E15

Light Load Type Model E20

Specification Table⇒A13-41

A basic single slide from the aluminum alloy series. Suitable for locations within magnetic fields, locations requiring rust-resistant materials, and locations where appearance is a factor.

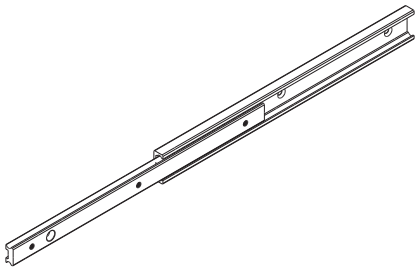


Light Load Type Model E20

Light Load Type Model D20

Specification Table⇒A13-42

The most compact and lightweight double slide in the aluminum alloy series. Suitable for locations within magnetic fields, locations requiring rust-resistant materials, and locations where appearance is a factor.

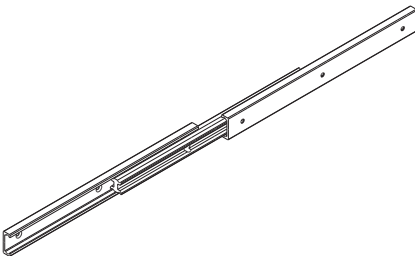

Light Load Type Model D20


Classification Table for Slide Rails

Slide Rail


Single Slide

For Light Load


Model FBL27S
Model FBL27S-P14




Model FBL35S
Model FBL35S-P13
Model FBL35S-P14




Model FBL35M



Model FBL35J



Model FBL35B



Model E15
(Made of Aluminum)




Model E20
(Made of Aluminum)




Double Slide

For Light Load

Model FBL27D




Model D20
(Made of aluminum)



Model FBL35N

Model FBL35N-P16




For Heavy Load


Model FBL56H

Model FBL56H-P13

Model FBL56H-P14



Model FBL35K



Linear Type Slide

For Medium Load



Model FBL35G-P13

Model FBL51H


Model FBL35G-P14

Model FBL51H-P13

Model FBL51H-P14




Model FBL35D




For Light Load

Model FBL35F



For Heavy Load

Model FBL48DR




Wheel Type

Model E36RS (Aluminum Outer Rail)



Slide Rail

Model FBL 27S

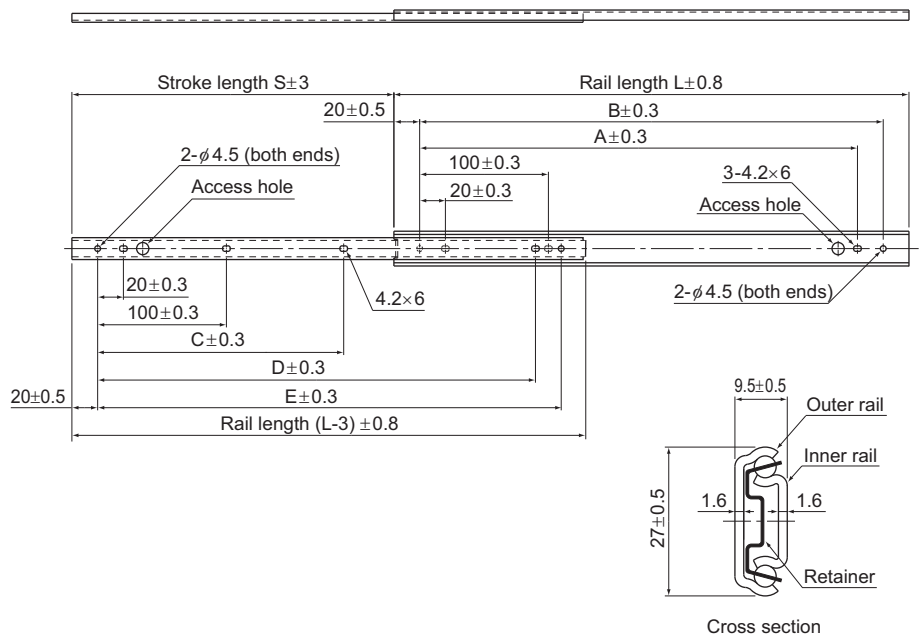

Unit: mm

Rail length L (± 0.8)	Stroke S (± 3)	Mounting hole dimensions					Mounting hole		Permissible load N/pair	Mass kg/pair
		A	B	C	D	E	Inner rail	Outer rail		
200	135	140	160	—	140	160	5	5	260	0.32
250	185	190	210	150	190	210	6	5	240	0.4
300	222	240	260	190	240	260	6	5	240	0.48
350	260	290	310	225	290	310	6	5	230	0.56
400	297	340	360	265	340	360	6	5	210	0.64
450	334	390	410	300	390	410	6	5	200	0.72
500	371	440	460	337	440	460	6	5	180	0.8

Note) The Permissible Load and Mass each indicate when used as a pair of 2 units.


Model number coding

FBL27S +300L

Model number

Overall rail length (mm)

Model FBL 27S-P14

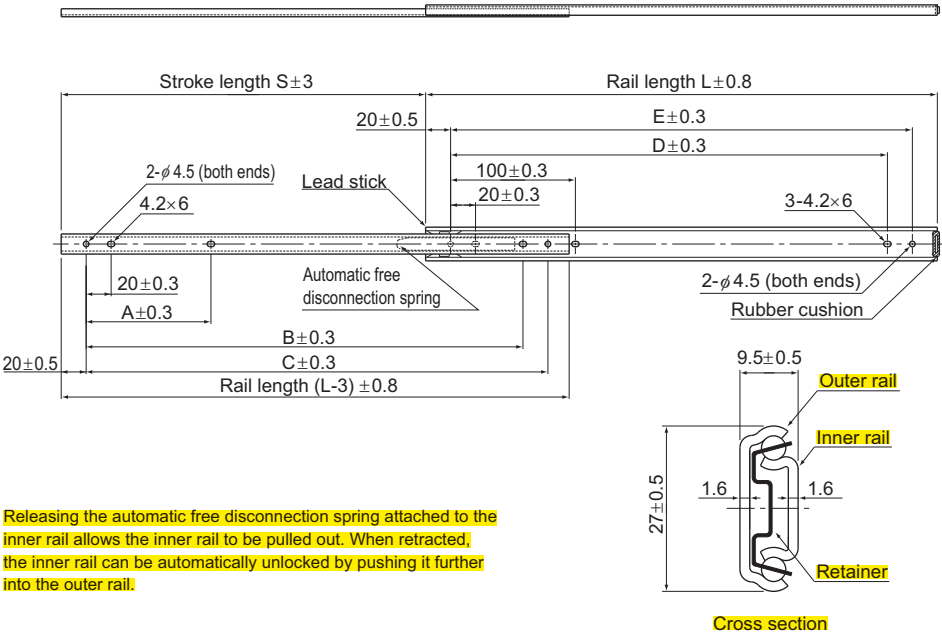

Unit: mm

Rail length L (± 0.8)	Stroke S (± 3)	Mounting hole dimensions					Mounting hole		Permissible load N/pair	Mass kg/pair
		A	B	C	D	E	Inner rail	Outer rail		
200	116	65	—	170	140	160	4	5	260	0.32
250	152	100	—	210	190	210	4	5	240	0.4
300	202	100	—	260	240	260	4	5	240	0.48
350	251	100	—	310	290	310	4	5	230	0.56
400	297	100	—	360	340	360	4	5	210	0.64
450	332	100	390	410	390	410	5	5	210	0.72
500	371	100	440	460	440	460	5	5	200	0.8
550	407	100	490	510	490	510	5	5	180	0.8


Note) The Permissible Load and Mass each indicate when used as a pair of 2 units.

Model number coding

FBL27S-P14 **+500L**

Model number Overall rail length (mm)

Model FBL 35S

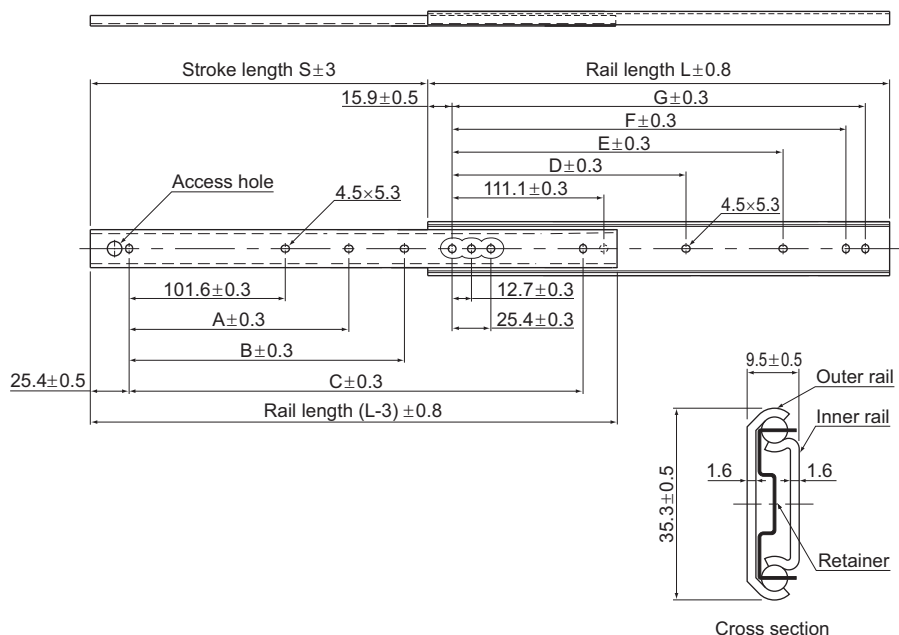

Unit: mm

Rail length L (± 0.8)	Stroke S (± 3)	Mounting hole dimensions							Mounting hole		Permissible load N/pair	Mass kg/pair
		A	B	C	D	E	F	G	Inner rail	Outer rail		
305	229	—	152.4	254	—	149.2	260.3	273	4	7	490	0.6
356	279	—	203.2	304.8	—	200	311.1	323.8	4	7	400	0.7
406	305	—	254	355.6	—	250.8	361.9	374.6	4	7	390	0.8
457	330	203.2	304.8	406.4	212.7	301.6	412.7	425.4	5	8	380	0.9
508	381	228.6	355.6	457.2	238.1	352.4	463.5	476.2	5	8	330	1
559	406	254	406.4	508	263.5	403.2	514.3	527	5	8	320	1.1
610	432	279.4	457.2	558.8	288.9	454	565.1	577.8	5	8	310	1.2
660	483	304.8	508	609.6	314.3	504.8	615.9	628.6	5	8	280	1.3
711	508	330.2	558.8	660.4	339.7	555.6	666.7	679.4	5	8	270	1.4

Note) The Permissible Load and Mass each indicate when used as a pair of 2 units.


Model number coding

FBL35S +457L

Model number

Overall rail length (mm)

Model FBL 35S-P13

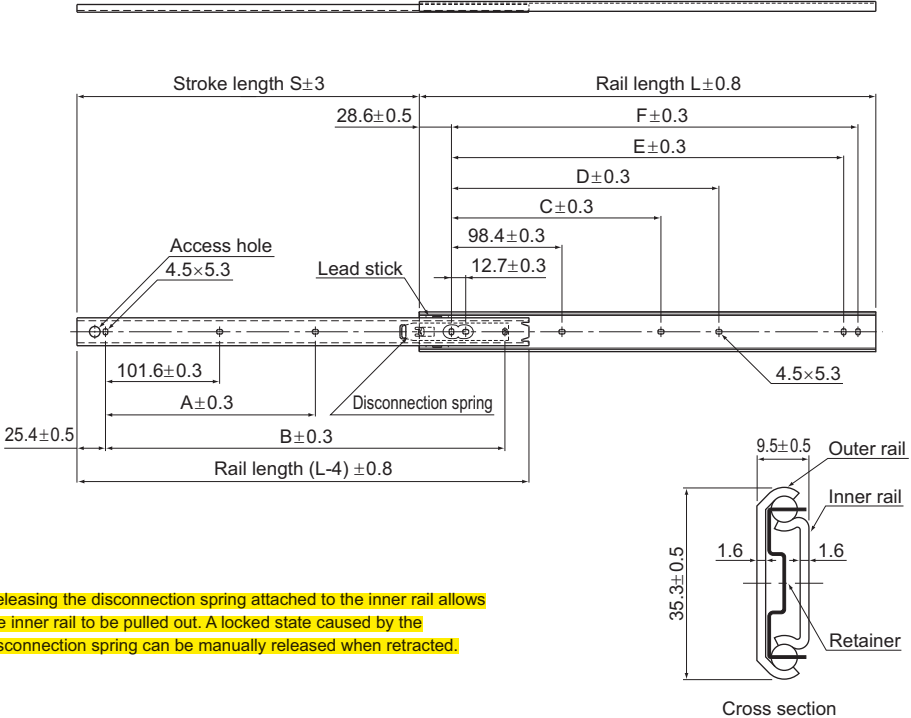

Releasing the disconnection spring attached to the inner rail allows the inner rail to be pulled out. A locked state caused by the disconnection spring can be manually released when retracted.

Rail length L (± 0.8)	Stroke S (± 3)	Mounting hole dimensions						Mounting hole		Permissible load N/pair	Mass kg/pair
		A	B	C	D	E	F	Inner rail	Outer rail		
305	224	152.4	—	136.5	—	247.6	260.3	3	6	490	0.6
356	275	203.2	—	187.3	—	298.4	311.1	3	6	400	0.72
406	315	254	—	238.1	—	349.2	361.9	3	6	390	0.84
457	330	203.2	406.4	200	288.9	400	412.7	4	7	380	0.96
508	381	228.6	457.2	225.4	339.7	450.8	463.5	4	7	330	1.04
559	406	254	508	250.8	390.5	501.6	514.3	4	7	320	1.16
610	432	279.4	558.8	276.2	441.3	552.4	565.1	4	7	310	1.24
660	483	304.8	609.6	301.6	492.1	603.2	615.9	4	7	280	1.36
711	493	330.2	660.4	327	542.9	654	666.7	4	7	270	1.48

Note) The Permissible Load and Mass each indicate when used as a pair of 2 units.


Model number coding

FBL35S-P13 +559L

Model number

Overall rail length (mm)

Model FBL 35S-P14

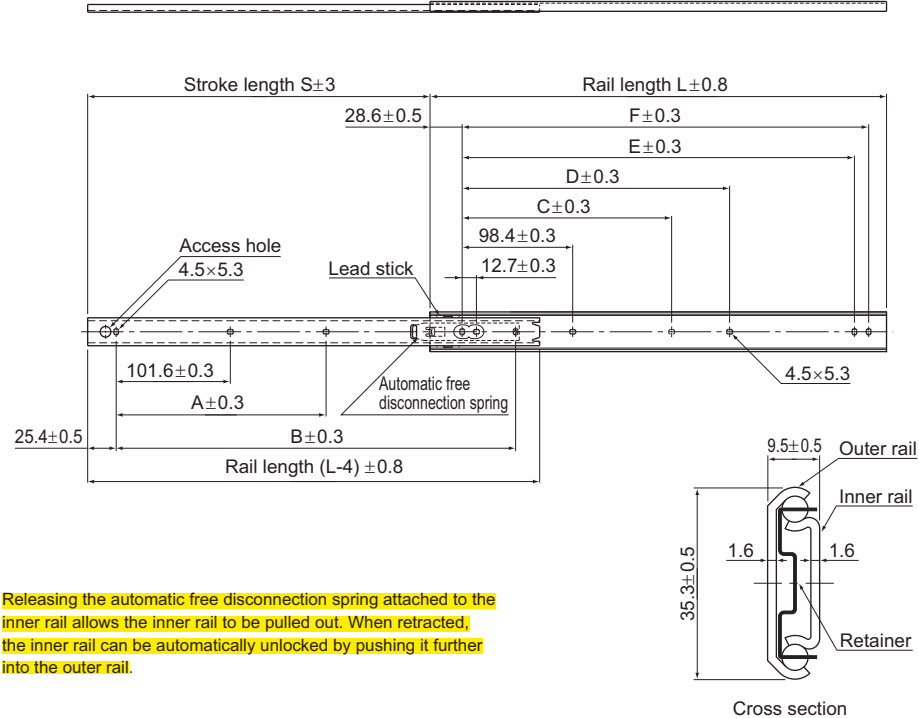

Releasing the automatic free disconnection spring attached to the inner rail allows the inner rail to be pulled out. When retracted, the inner rail can be automatically unlocked by pushing it further into the outer rail.

Rail length L (± 0.8)	Stroke S (± 3)	Mounting hole dimensions						Mounting hole		Permissible load N/pair	Mass kg/pair
		A	B	C	D	E	F	Inner rail	Outer rail		
305	224	152.4	—	136.5	—	247.6	260.3	3	6	490	0.6
356	275	203.2	—	187.3	—	298.4	311.1	3	6	400	0.72
406	315	254	—	238.1	—	349.2	361.9	3	6	390	0.84
457	330	203.2	406.4	200	288.9	400	412.7	4	7	380	0.96
508	381	228.6	457.2	225.4	339.7	450.8	463.5	4	7	330	1.04
559	406	254	508	250.8	390.5	501.6	514.3	4	7	320	1.16
610	432	279.4	558.8	276.2	441.3	552.4	565.1	4	7	310	1.24
660	483	304.8	609.6	301.6	492.1	603.2	615.9	4	7	280	1.36
711	493	330.2	660.4	327	542.9	654	666.7	4	7	270	1.48


Note) The Permissible Load and Mass each indicate when used as a pair of 2 units.

Model number coding

FBL35S-P14 +559L

Model number Overall rail length (mm)

Model FBL 35M

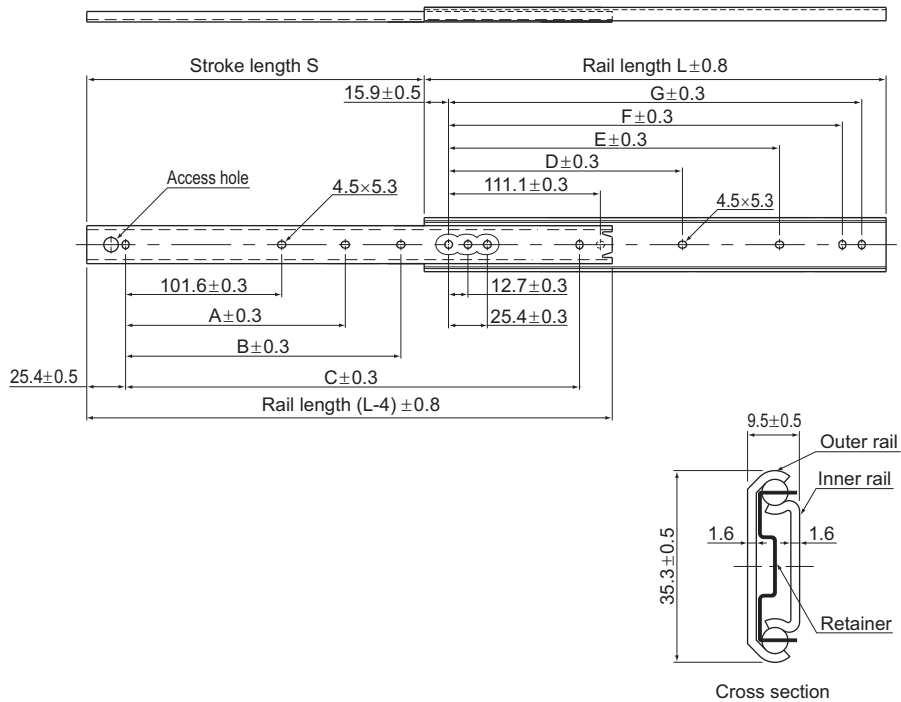

Unit: mm

Rail length L (±0.8)	Stroke S	Mounting hole dimensions							Mounting hole		Permissible load N/pair	Mass kg/pair
		A	B	C	D	E	F	G	Inner rail	Outer rail		
305	229	—	152.4	254	—	149.2	260.3	273	4	7	490	0.6
356	279	—	203.2	304.8	—	200	311.1	323.8	4	7	400	0.7
406	305	—	254	355.6	—	250.8	361.9	374.6	4	7	390	0.8
457	330	203.2	304.8	406.4	212.7	301.6	412.7	425.4	5	8	380	0.9
508	381	228.6	355.6	457.2	238.1	352.4	463.5	476.2	5	8	330	1
559	406	254	406.4	508	263.5	403.2	514.3	527	5	8	320	1.1
610	432	279.4	457.2	558.8	288.9	454	565.1	577.8	5	8	310	1.2
660	483	304.8	508	609.6	314.3	504.8	615.9	628.6	5	8	280	1.3
711	508	330.2	558.8	660.4	339.7	555.6	666.7	679.4	5	8	270	1.4

Note) The Permissible Load and Mass each indicate when used as a pair of 2 units.


Model number coding

FBL35M +406L

Model number Overall rail length (mm)

Slide Rail

Model FBL 35J

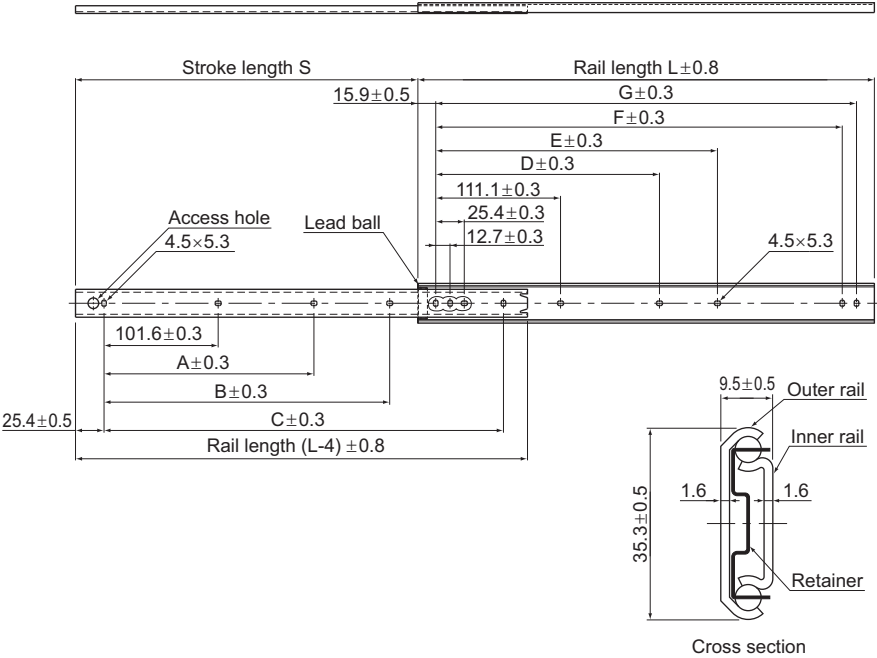

Unit: mm

Rail length L (±0.8)	Stroke S	Mounting hole dimensions							Mounting hole		Permissible load N/pair	Mass kg/pair
		A	B	C	D	E	F	G	Inner rail	Outer rail		
305	229	—	152.4	254	—	149.2	260.3	273	4	7	490	0.6
356	279	—	203.2	304.8	—	200	311.1	323.8	4	7	400	0.7
406	305	—	254	355.6	—	250.8	361.9	374.6	4	7	390	0.8
457	330	203.2	304.8	406.4	212.7	301.6	412.7	425.4	5	8	380	0.9
508	381	228.6	355.6	457.2	238.1	352.4	463.5	476.2	5	8	330	1
559	406	254	406.4	508	263.5	403.2	514.3	527	5	8	320	1.1
610	432	279.4	457.2	558.8	288.9	454	565.1	577.8	5	8	310	1.2
660	483	304.8	508	609.6	314.3	504.8	615.9	628.6	5	8	280	1.3
711	508	330.2	558.8	660.4	339.7	555.6	666.7	679.4	5	8	270	1.4



Note) The Permissible Load and Mass each indicate when used as a pair of 2 units.

Model number coding

FBL35J +660L

Model number Overall rail length (mm)

Model FBL 35B

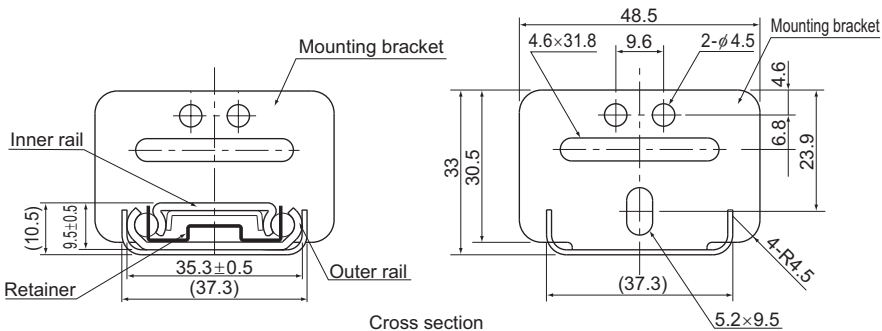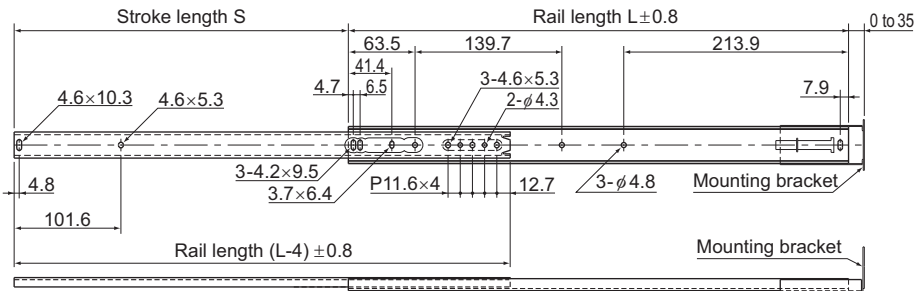

Unit: mm

Rail length L (±0.8)	Stroke S	Mounting hole		Permissible load N/pair	Mass kg/pair
		Inner rail	Outer rail		
324	216	7	7	115	0.8
375	267	7	7	105	0.92
425	305	7	7	100	1
476	318	7	7	90	1.12
527	368	7	7	83	1.24
578	419	7	7	73	1.32
629	445	7	7	66	1.44
679	495	7	7	61	1.6

Note) The Permissible Load and Mass each indicate when used as a pair of 2 units.


Model number coding

FBL35B +375L

Model number

Overall rail length (mm)

Model FBL 27D

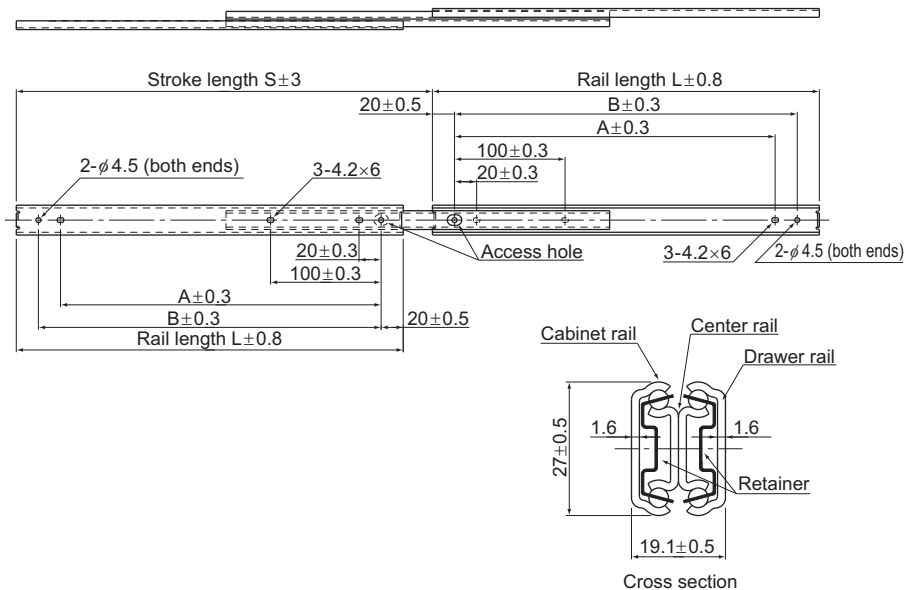

Unit: mm

Rail length L (±0.8)	Stroke S (±3)	Mounting hole dimensions		Mounting hole		Permissible load N/pair	Mass kg/pair
		A	B	Drawer rail	Cabinet rail		
200	229	140	160	5	5	370	0.64
250	276	190	210	5	5	360	0.8
300	327	240	260	5	5	350	0.96
350	376	290	310	5	5	330	1.12
400	426	340	360	5	5	310	1.28
450	475	390	410	5	5	290	1.46
500	524	440	460	5	5	280	1.6


Note) The Permissible Load and Mass each indicate when used as a pair of 2 units.

Model number coding

FBL27D +200L

Model number Overall rail length (mm)

Model FBL 35N

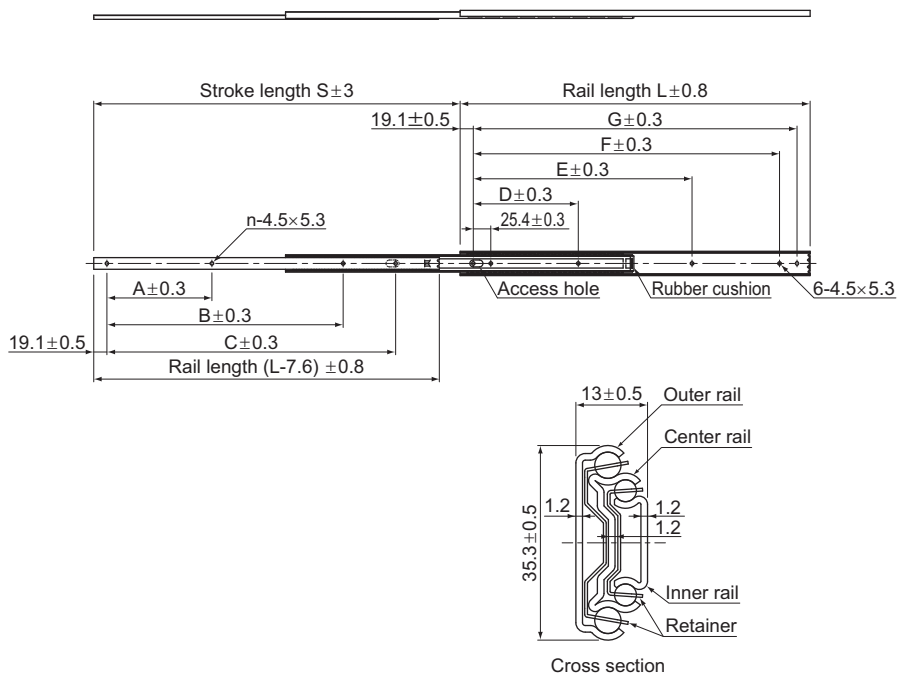

Unit: mm


Rail length L (±0.8)	Stroke S (±3)	Mounting hole dimensions							Mounting hole n	Permissible load N/pair	Mass kg/pair
		A	B	C	D	E	F	G	Inner rail		
254	280	76.2	154.9	180.3	76.2	139.7	190.5	215.9	4	290	0.61
305	330	76.2	154.9	231.1	76.2	190.5	241.3	266.7	4	290	0.74
356	381	127	—	266.7	88.9	215.9	292.1	317.5	3	280	0.86
406	432	152.4	—	317.5	127	241.3	342.9	368.3	3	270	0.98
457	483	177.8	—	368.3	127	292.1	393.7	419.1	3	250	1.1
508	533	152.4	342.9	419.1	152.4	317.5	444.5	469.9	4	240	1.22

Model number coding

FBL35N +508L

Model No.	Overall rail length (mm)
1	100
2	100
3	100
4	100
5	100
6	100
7	100
8	100
9	100
10	100
11	100
12	100
13	100
14	100
15	100
16	100
17	100
18	100
19	100
20	100
21	100
22	100
23	100
24	100
25	100
26	100
27	100
28	100
29	100
30	100
31	100
32	100
33	100
34	100
35	100
36	100
37	100
38	100
39	100
40	100
41	100
42	100
43	100
44	100
45	100
46	100
47	100
48	100
49	100
50	100
51	100
52	100
53	100
54	100
55	100
56	100
57	100
58	100
59	100
60	100
61	100
62	100
63	100
64	100
65	100
66	100
67	100
68	100
69	100
70	100
71	100
72	100
73	100
74	100
75	100
76	100
77	100
78	100
79	100
80	100
81	100
82	100
83	100
84	100
85	100
86	100
87	100
88	100
89	100
90	100
91	100
92	100
93	100
94	100
95	100
96	100
97	100
98	100
99	100
100	100

Model FBL 35N-P16

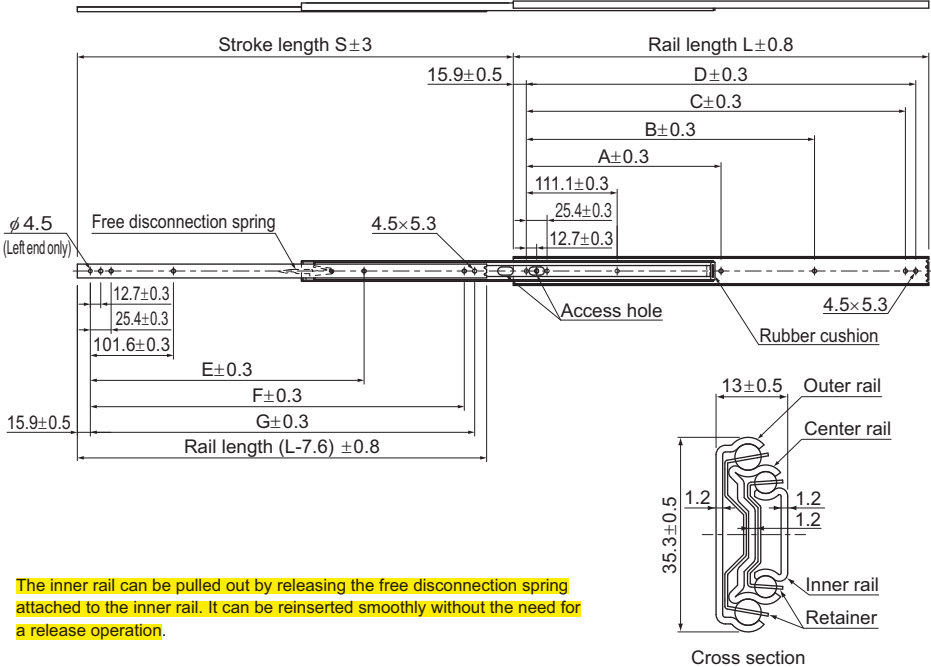

Unit: mm

Rail length L (±0.8)	Stroke S (±3)	Mounting hole dimensions							Mounting hole		Permissible load N/pair	Mass kg/pair
		A	B	C	D	E	F	G	Inner rail	Outer rail		
254	280	—	—	209.5	222.2	—	203.2	215.9	6	6	290	0.61
305	330	—	149.2	260.3	273	233.1	254	266.7	7	7	290	0.74
356	381	—	200	311.1	323.8	258.5	304.8	317.5	7	7	280	0.86
406	432	—	250.8	361.9	374.6	283.9	355.6	368.3	7	7	270	0.98
457	483	212.7	301.6	412.7	425.4	309.3	406.4	419.1	7	8	250	1.1
508	533	238.1	352.4	463.5	476.2	334.7	457.2	469.9	7	8	240	1.22

Model number coding


FBL35N-P16 +508L

Model number

Overall rail length (mm)

Slide Rail

Model FBL 35G-P13

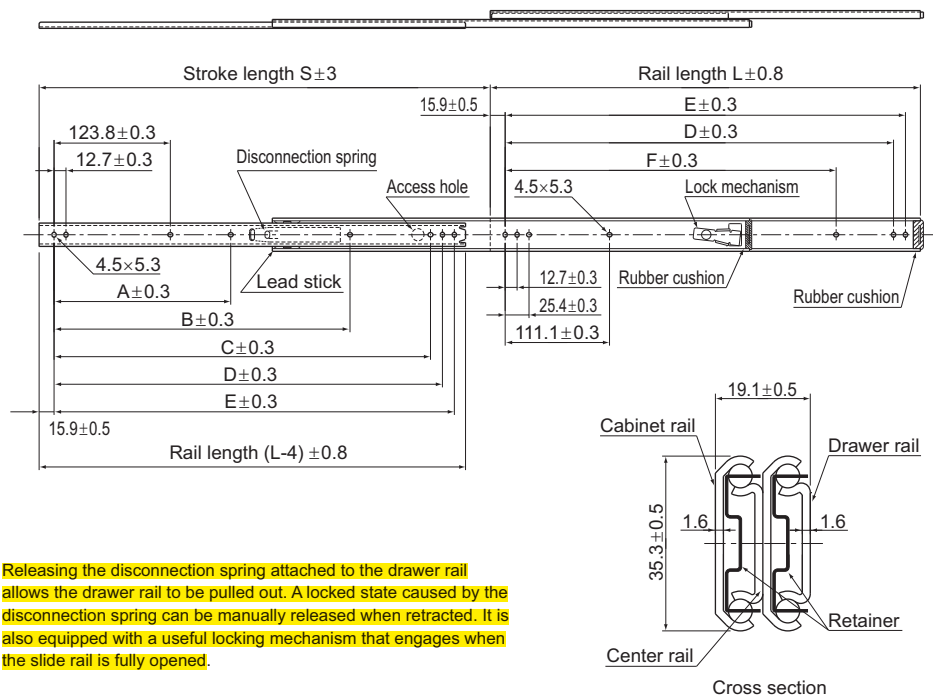

Releasing the disconnection spring attached to the drawer rail allows the drawer rail to be pulled out. A locked state caused by the disconnection spring can be manually released when retracted. It is also equipped with a useful locking mechanism that engages when the slide rail is fully opened.

Rail length L (± 0.8)	Stroke S (± 3)	Mounting hole dimensions						Mounting hole		Permissible load N/pair	Mass kg/pair
		A	B	C	D	E	F	Drawer rail	Cabinet rail		
305	327	—	—	—	260.3	273	—	5	6	623	1.2
356	378	—	—	298.4	311.1	323.8	—	6	6	586	1.4
406	429	—	—	349.2	361.9	374.6	250.8	6	7	555	1.6
457	480	212.7	—	400	412.7	425.4	301.6	7	7	516	1.8
508	530	238.1	365.1	450.8	463.5	476.2	352.4	8	7	475	2
559	581	263.5	415.9	501.6	514.3	527	403.2	8	7	444	2.2
610	632	288.9	466.7	552.4	565.1	577.8	454	8	7	413	2.4
660	683	314.3	517.5	603.2	615.9	628.6	504.8	8	7	382	2.6
711	734	339.7	568.3	654	666.7	679.4	555.6	8	7	355	2.8

Note) The Permissible Load and Mass each indicate when used as a pair of 2 units.


Model number coding

FBL35G-P13 +356L

Model number

Overall rail length (mm)

Model FBL 35G-P14

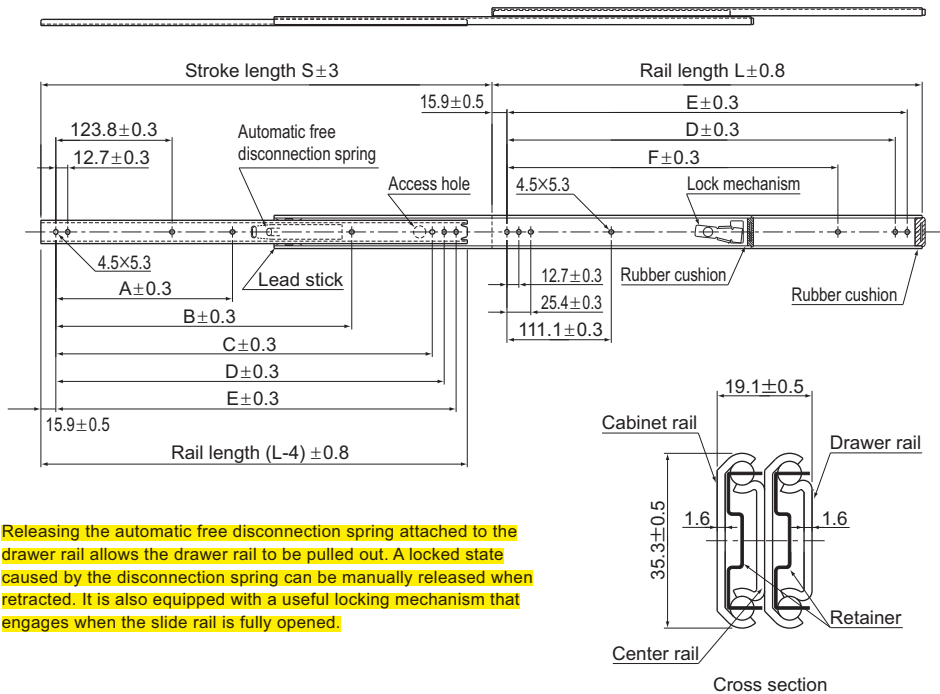

Releasing the automatic free disconnection spring attached to the drawer rail allows the drawer rail to be pulled out. A locked state caused by the disconnection spring can be manually released when retracted. It is also equipped with a useful locking mechanism that engages when the slide rail is fully opened.

Rail length L (± 0.8)	Stroke S (± 3)	Mounting hole dimensions						Mounting hole		Permissible load N/pair	Mass kg/pair
		A	B	C	D	E	F	Drawer rail	Cabinet rail		
305	327	—	—	—	260.3	273	—	5	6	623	1.2
356	378	—	—	298.4	311.1	323.8	—	6	6	586	1.4
406	429	—	—	349.2	361.9	374.6	250.8	6	7	555	1.6
457	480	212.7	—	400	412.7	425.4	301.6	7	7	516	1.8
508	530	238.1	365.1	450.8	463.5	476.2	352.4	8	7	475	2
559	581	263.5	415.9	501.6	514.3	527	403.2	8	7	444	2.2
610	632	288.9	466.7	552.4	565.1	577.8	454	8	7	413	2.4
660	683	314.3	517.5	603.2	615.9	628.6	504.8	8	7	382	2.6
711	734	339.7	568.3	654	666.7	679.4	555.6	8	7	355	2.8

Note) The Permissible Load and Mass each indicate when used as a pair of 2 units.


Model number coding

FBL35G-P14 +610L

Model number

Overall rail length (mm)

Model FBL 35D

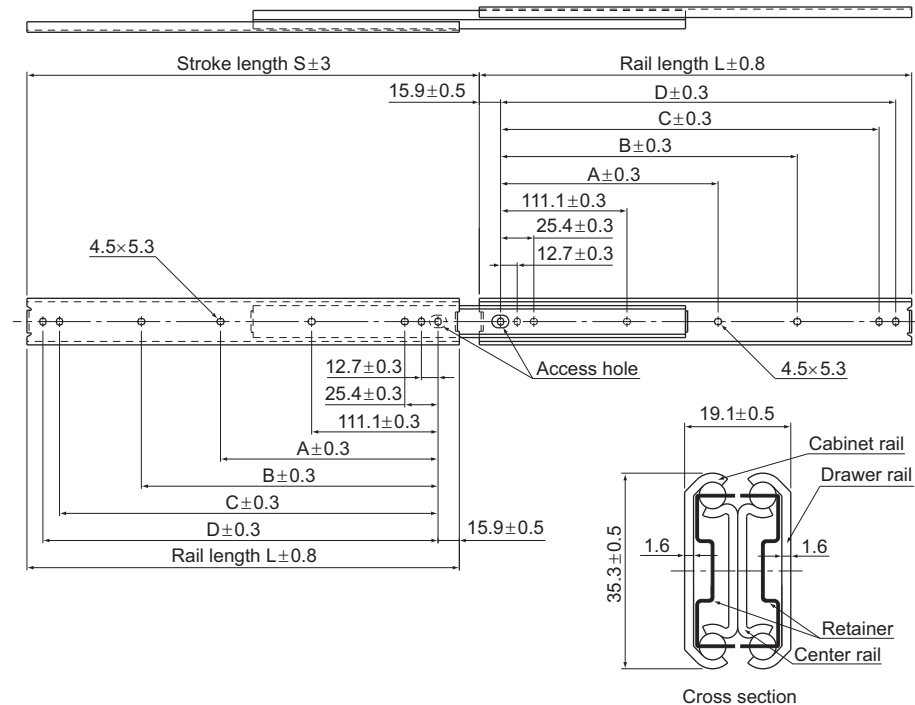

Unit: mm

Rail length L (±0.8)	Stroke S (±3)	Mounting hole dimensions				Mounting hole		Permissible load N/pair	Mass kg/pair
		A	B	C	D	Drawer rail	Cabinet rail		
305	327	—	149.2	260.3	273	7	7	588	1.28
356	378	—	200	311.1	323.8	7	7	578	1.48
406	429	—	250.8	361.9	374.6	7	7	559	1.72
457	480	212.7	301.6	412.7	425.4	8	8	549	1.96
508	530	238.1	352.4	463.5	476.2	8	8	529	2.12
559	581	263.5	403.2	514.3	527	8	8	500	2.4
610	632	288.9	454	565.1	577.8	8	8	480	2.56
660	683	314.3	504.8	615.9	628.6	8	8	461	2.8
711	734	339.7	555.6	666.7	679.4	8	8	441	3


Note) The Permissible Load and Mass each indicate when used as a pair of 2 units.

Model number coding

FBL35D +711L

Model number Overall rail length (mm)

Model FBL 51H

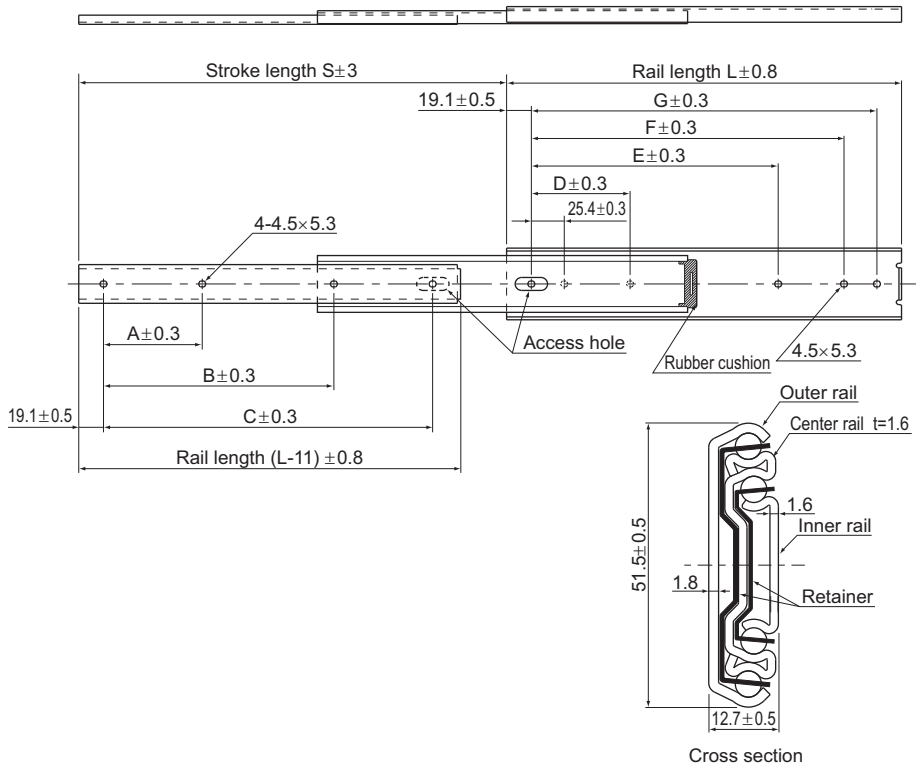

Unit: mm

Rail length L (± 0.8)	Stroke S (± 3)	Mounting hole dimensions							Mounting hole		Permissible load N/pair	Mass kg/pair
		A	B	C	D	E	F	G	Inner rail	Outer rail		
305	330	76.2	177.8	254	76.2	190.5	241.3	266.7	4	6	850	1.46
356	381	101.6	203.2	304.8	88.9	215.9	292.1	317.5	4	6	820	1.72
406	432	127	228.6	355.6	127	241.3	342.9	368.3	4	6	770	1.89
457	483	127	279.4	406.4	127	292.1	393.7	419.1	4	6	730	2.26
508	533	152.4	304.8	457.2	152.4	317.5	444.5	469.9	4	6	710	2.52
559	584	177.8	330.2	508	177.8	342.9	495.3	520.7	4	6	690	2.72
610	635	177.8	381	558.8	177.8	393.7	546.1	571.5	4	6	660	3
660	686	203.2	406.4	609.6	203.2	419.1	596.9	622.3	4	6	630	3.25
711	737	228.6	431.8	660.4	228.6	444.5	647.7	673.1	4	6	610	3.54
762	787	228.6	457.2	711.2	228.6	469.9	698.5	723.9	4	6	580	3.86


Note) The Permissible Load and Mass each indicate when used as a pair of 2 units.

Model number coding

FBL51H +610L

Model number Overall rail length (mm)

Model FBL 51H-P13

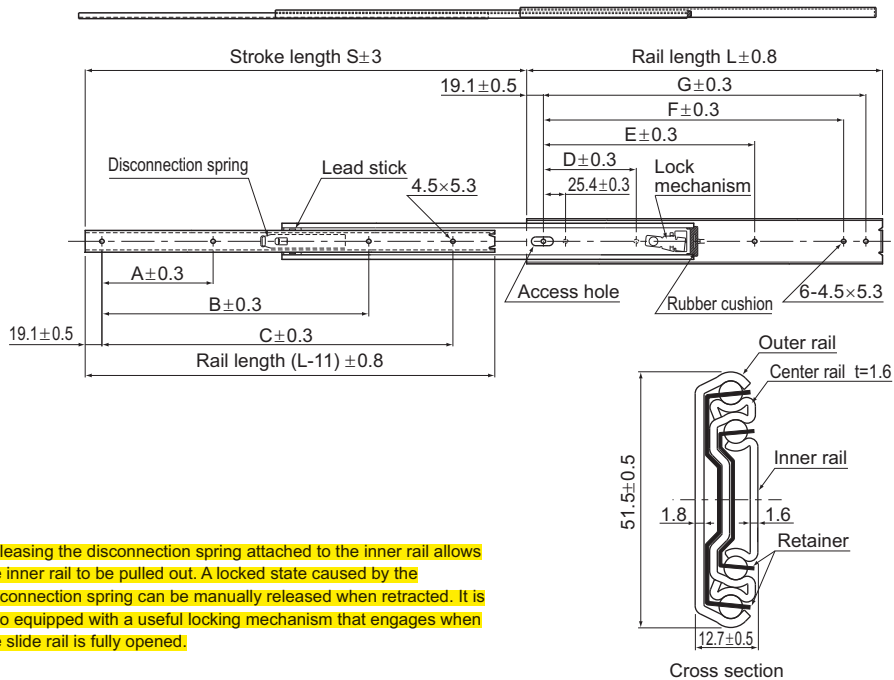

Releasing the disconnection spring attached to the inner rail allows the inner rail to be pulled out. A locked state caused by the disconnection spring can be manually released when retracted. It is also equipped with a useful locking mechanism that engages when the slide rail is fully opened.

Rail length L (±0.8)	Stroke S (±3)	Mounting hole dimensions							Mounting hole		Permissible load N/pair	Mass kg/pair
		A	B	C	D	E	F	G	Inner rail	Outer rail		
305	330	76.2	—	190.5	76.2	190.5	241.3	266.7	3	6	850	1.46
356	381	101.6	—	266.7	88.9	215.9	292.1	317.5	3	6	820	1.72
406	432	127	—	304.8	127	241.3	342.9	368.3	3	6	770	1.89
457	483	127	317.5	368.3	127	292.1	393.7	419.1	4	6	730	2.26
508	533	152.4	355.6	406.4	152.4	317.5	444.5	469.9	4	6	710	2.52
559	584	177.8	381	457.2	177.8	342.9	495.3	520.7	4	6	690	2.72
610	635	177.8	430.8	508	177.8	393.7	546.1	571.5	4	6	660	3
660	686	203.2	457.2	558.8	203.2	419.1	596.9	622.3	4	6	630	3.25
711	737	228.6	508	609.6	228.6	444.5	647.7	673.1	4	6	610	3.54
762	787	228.6	533.4	660.4	228.6	469.9	698.5	723.9	4	6	580	3.86

(Note) The Permissible Load and Mass each indicate when used as a pair of 2 units.

Model number coding


FBL51H-P13

+559L

Model number

Overall rail length (mm)

Model FBL 51H-P14

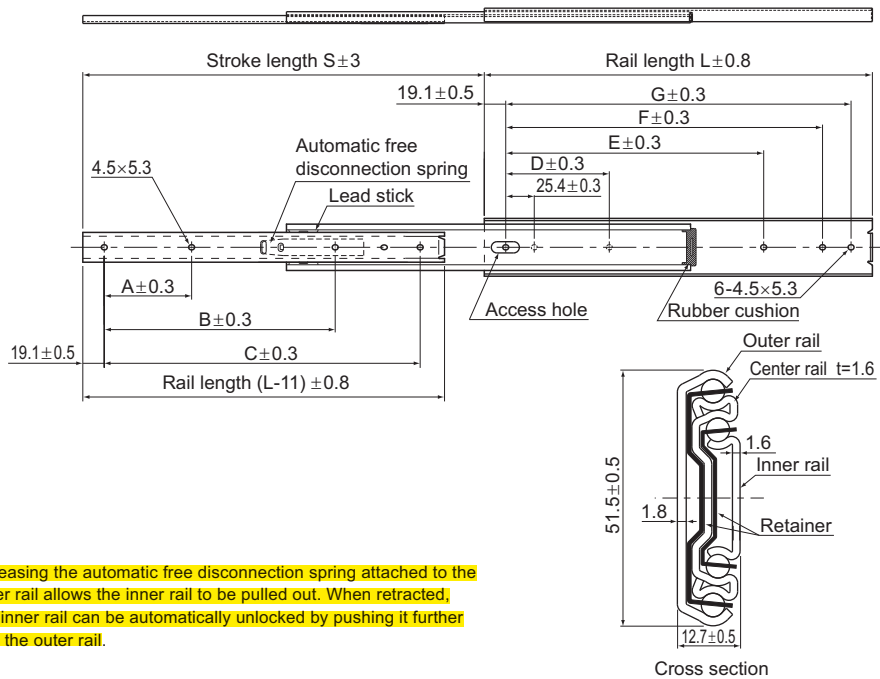

Releasing the automatic free disconnection spring attached to the inner rail allows the inner rail to be pulled out. When retracted, the inner rail can be automatically unlocked by pushing it further into the outer rail.

Unit: mm

Rail length L (±0.8)	Stroke S (±3)	Mounting hole dimensions							Mounting hole		Permissible load N/pair	Mass kg/pair
		A	B	C	D	E	F	G	Inner rail	Outer rail		
305	330	76.2	—	254	76.2	190.5	241.3	266.7	3	6	850	1.46
356	381	127	—	304.8	88.9	215.9	292.1	317.5	3	6	820	1.72
406	432	152.4	317.5	355.6	127	241.3	342.9	368.3	4	6	770	1.89
457	483	177.8	368.3	406.4	127	292.1	393.7	419.1	4	6	730	2.26
508	533	152.4	419.1	457.2	152.4	317.5	444.5	469.9	4	6	710	2.52
559	584	177.8	469.9	508	177.8	342.9	495.3	520.7	4	6	690	2.72
610	635	177.8	520.7	558.8	177.8	393.7	546.1	571.5	4	6	660	3
660	686	203.2	571.5	609.6	203.2	419.1	596.9	622.3	4	6	630	3.25
711	737	228.6	622.3	660.4	228.6	444.5	647.7	673.1	4	6	610	3.54
762	787	228.6	673.1	711.2	228.6	469.9	698.5	723.9	4	6	580	3.86

Note) The Permissible Load and Mass each indicate when used as a pair of 2 units.


Model number coding

FBL51H-P14 +305L

Model number

Overall rail length (mm)

Model FBL 35K

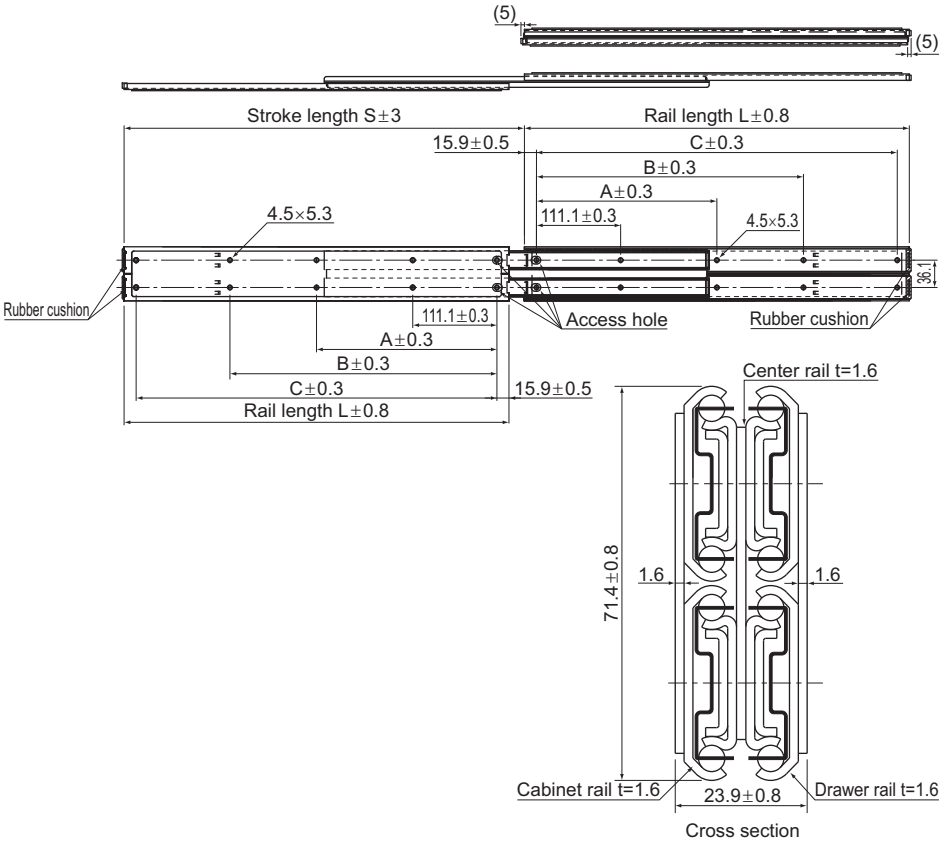

Note) The product has a rubber cushion.
If desiring to keep the length within the rail length when storing the product, remove the rubber cushion.

Unit: mm

Rail length L (±0.8)	Stroke S (±3)	Mounting hole dimensions			Mounting hole		Permissible load N/pair	Mass kg/pair
		A	B	C	Drawer rail	Cabinet rail		
305	327	—	149.2	273	4	4	2670	4.04
356	378	—	200	323.8	4	4	2630	4.8
406	429	—	250.8	374.6	4	4	2540	5.6
457	480	212.7	301.6	425.4	5	5	2450	6.04
508	530	238.1	352.4	476.2	5	5	2360	6.92
559	581	263.5	403.2	527	5	5	2250	7.56
610	632	288.9	454	577.8	5	5	2120	8.4
660	683	314.3	504.8	628.6	5	5	1960	9
711	734	339.7	555.6	679.4	5	5	1780	9.68


Note) The Permissible Load and Mass each indicate when used as a pair of 2 units.

Model number coding

FBL35K +711L

Model number Overall rail length (mm)

Model FBL 56H

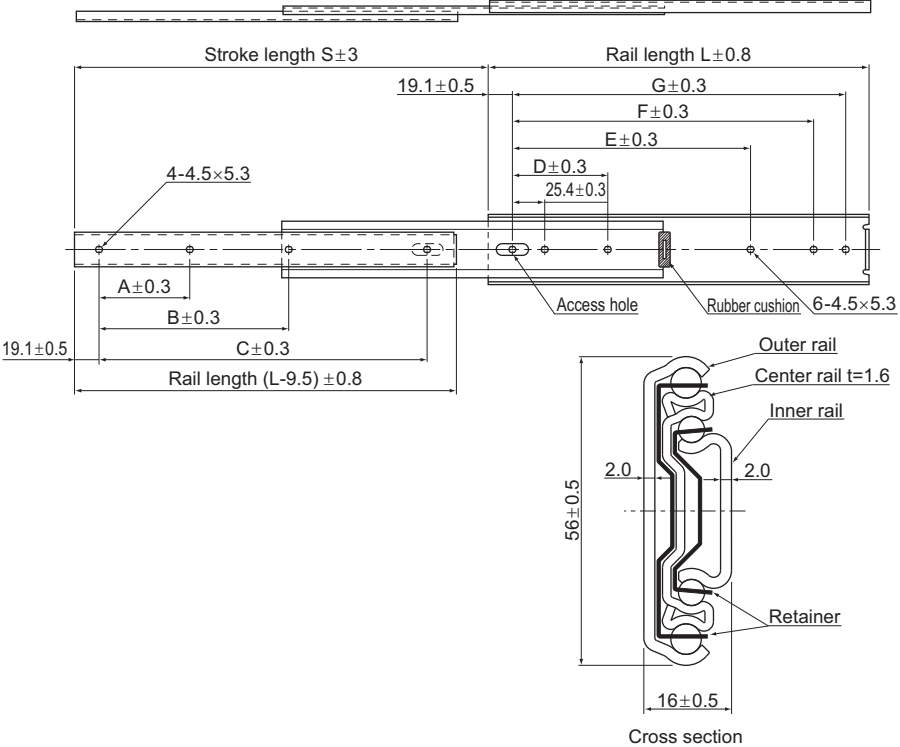

Unit: mm

Rail length L (±0.8)	Stroke S (±3)	Mounting hole dimensions							Mounting hole		Permissible load N/pair	Mass kg/pair
		A	B	C	D	E	F	G	Inner rail	Outer rail		
305	330	76.2	177.8	254	76.2	190.5	241.3	266.7	4	6	961	1.76
356	381	101.6	203.2	304.8	88.9	215.9	292.1	317.5	4	6	951	2.04
406	432	127	228.6	355.6	127	241.3	342.9	368.3	4	6	941	2.36
457	483	127	279.4	406.4	127	292.1	393.7	419.1	4	6	922	2.64
508	533	152.4	304.8	457.2	152.4	317.5	444.5	469.9	4	6	902	2.96
559	584	177.8	330.2	508	177.8	342.9	495.3	520.7	4	6	882	3.24
610	635	177.8	381	558.8	177.8	393.7	546.1	571.5	4	6	863	3.6
660	686	203.2	406.4	609.6	203.2	419.1	596.9	622.3	4	6	843	3.84
711	737	228.6	431.8	660.4	228.6	444.5	647.7	673.1	4	6	824	4.06
762	787	228.6	457.2	711.2	228.6	469.9	698.5	723.9	4	6	784	4.44


Note) The Permissible Load and Mass each indicate when used as a pair of 2 units.

Model number coding

FBL56H +406L

Model number Overall rail length (mm)

Model FBL 56H-P13

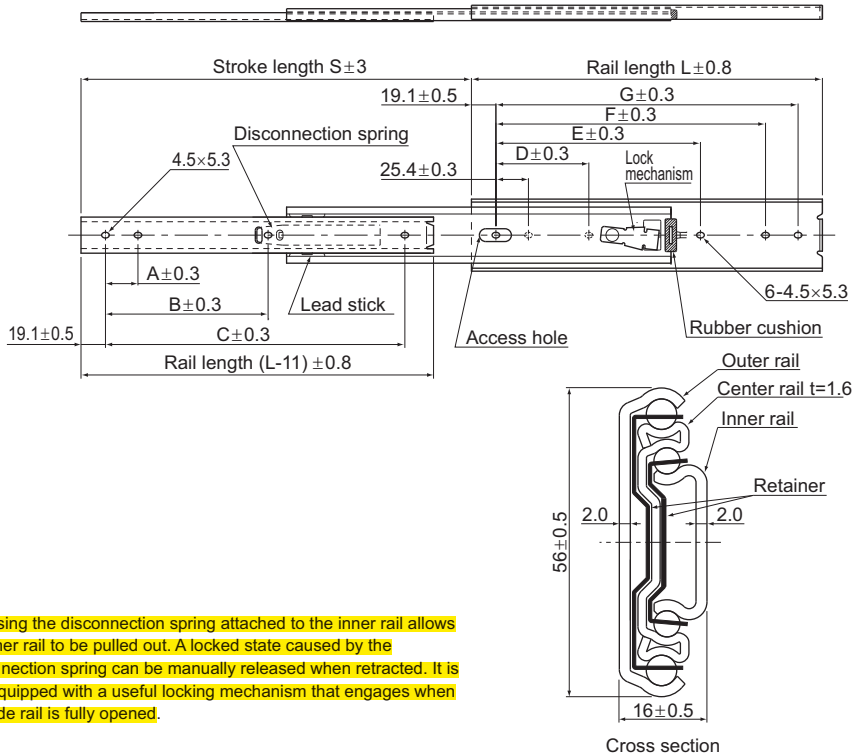

Releasing the disconnection spring attached to the inner rail allows the inner rail to be pulled out. A locked state caused by the disconnection spring can be manually released when retracted. It is also equipped with a useful locking mechanism that engages when the slide rail is fully opened.

Cross section

Unit: mm

Rail length L (±0.8)	Stroke S (±3)	Mounting hole dimensions							Mounting hole		Permissible load N/pair	Mass kg/pair
		A	B	C	D	E	F	G	Inner rail	Outer rail		
305	330	76.2	—	254	76.2	190.5	241.3	266.7	3	6	961	1.76
356	381	127	—	304.8	88.9	215.9	292.1	317.5	3	6	951	2.04
406	432	152.4	317.5	355.6	127	241.3	342.9	368.3	4	6	941	2.36
457	483	177.8	368.3	406.4	127	292.1	393.7	419.1	4	6	922	2.64
508	533	152.4	419.1	457.2	152.4	317.5	444.5	469.9	4	6	902	2.96
559	584	177.8	469.9	508	177.8	342.9	495.3	520.7	4	6	882	3.24
610	635	177.8	520.7	558.8	177.8	393.7	546.1	571.5	4	6	863	3.6
660	686	203.2	571.5	609.6	203.2	419.1	596.9	622.3	4	6	843	3.84
711	737	228.6	622.3	660.4	228.6	444.5	647.7	673.1	4	6	824	4.06
762	787	228.6	673.1	711.2	228.6	469.9	698.5	723.9	4	6	784	4.44

Note) The Permissible Load and Mass each indicate when used as a pair of 2 units.


Model number coding

FBL56H-P13 +762L

Model number

Overall rail length (mm)

Model FBL 56H-P14

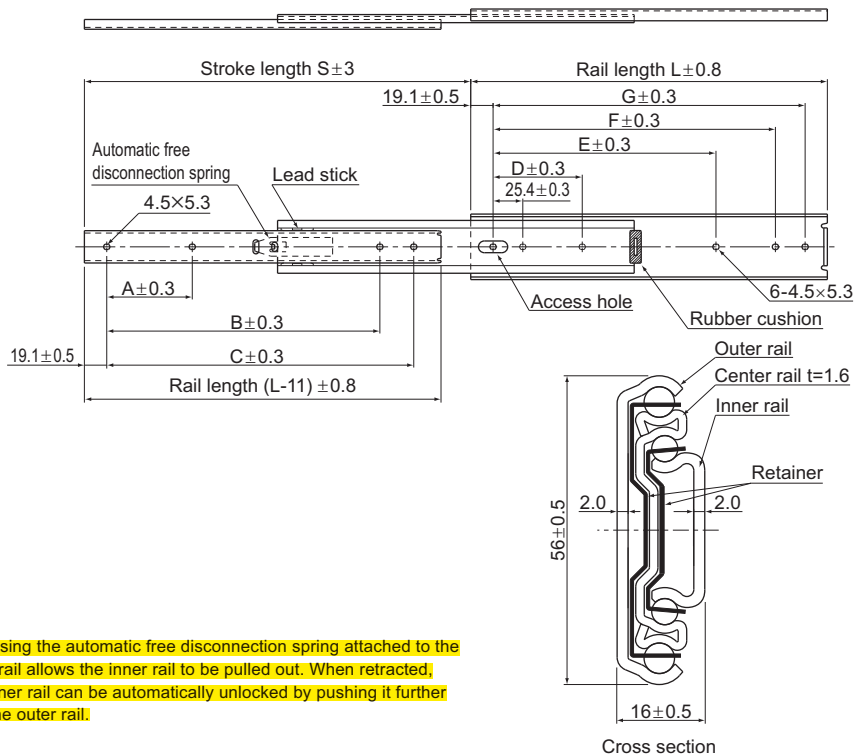

Releasing the automatic free disconnection spring attached to the inner rail allows the inner rail to be pulled out. When retracted, the inner rail can be automatically unlocked by pushing it further into the outer rail.

Rail length L (±0.8)	Stroke S (±3)	Mounting hole dimensions							Mounting hole		Permissible load N/pair	Mass kg/pair
		A	B	C	D	E	F	G	Inner rail	Outer rail		
305	330	76.2	—	254	76.2	190.5	241.3	266.7	3	6	961	1.76
356	381	127	—	304.8	88.9	215.9	292.1	317.5	3	6	951	2.04
406	432	152.4	317.5	355.6	127	241.3	342.9	368.3	4	6	941	2.36
457	483	177.8	368.3	406.4	127	292.1	393.7	419.1	4	6	922	2.64
508	533	152.4	419.1	457.2	152.4	317.5	444.5	469.9	4	6	902	2.96
559	584	177.8	469.9	508	177.8	342.9	495.3	520.7	4	6	882	3.24
610	635	177.8	520.7	558.8	177.8	393.7	546.1	571.5	4	6	863	3.6
660	686	203.2	571.5	609.6	203.2	419.1	596.9	622.3	4	6	843	3.84
711	737	228.6	622.3	660.4	228.6	444.5	647.7	673.1	4	6	824	4.06
762	787	228.6	673.1	711.2	228.6	469.9	698.5	723.9	4	6	784	4.44

Note) The Permissible Load and Mass each indicate when used as a pair of 2 units.

Model number coding

FBL56H-P14



+457L

Model number

Overall rail length (mm)

Slide Rail

Model FBL 35F

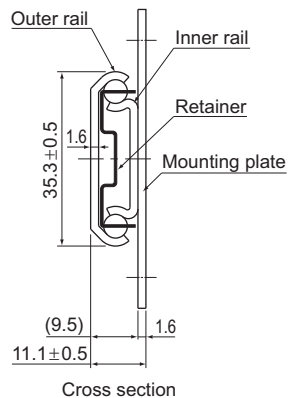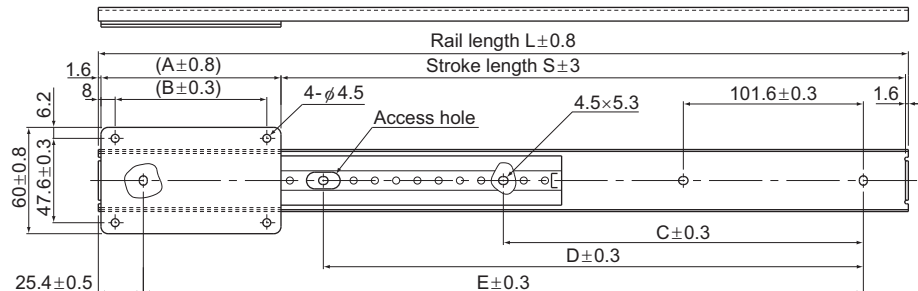

Mass		Unit: kg/pair					
Rail length L (±0.8)	Mounting plate Model No.						
mm	#3	#4	#5	#6	#7	#8	
305	0.6	0.67	0.74	0.81	—	—	
356	0.66	0.73	0.8	0.87	0.94	1.01	
406	0.73	0.8	0.87	0.94	1.01	1.08	
457	0.8	0.87	0.94	1.01	1.08	1.15	
508	0.86	0.93	1	1.07	1.14	1.21	
559	0.93	1	1.07	1.14	1.21	1.28	
610	1	1.07	1.14	1.21	1.28	1.35	
660	1.06	1.13	1.2	1.27	1.34	1.41	
711	1.13	1.2	1.27	1.34	1.41	1.48	
762	1.2	1.27	1.34	1.41	1.48	1.55	

Note) The mass indicates the value for a pair of 2 product units.

Unit: mm

Mounting plate	Model No.	#3	#4	#5	#6	#7	#8	Dimension of the outer rail mounting hole (±0.3)		
Length (A±0.8)		76.2	101.6	127	152.4	177.8	203.2	C	D	E
Rail length L (±0.8)	Stroke length S (±3) *Varies with the combination with the mounting plate above.									
305	225.4	200	174.6	149.2	—	—	—	152.4	254	
356	276.2	250.8	225.4	200	174.6	149.2	—	203.2	304.8	
406	327	301.6	276.2	250.8	225.4	200	—	254	355.6	
457	377.8	352.4	327	301.6	276.2	250.8	203.2	304.8	406.4	
508	428.6	403.2	377.8	352.4	327	301.6	228.6	355.6	457.2	
559	479.4	454	428.6	403.2	377.8	352.4	254	406.4	508	
610	530.2	504.8	479.4	454	428.6	403.2	279.4	457.2	558.8	
660	581	555.6	530.2	504.8	479.4	454	304.8	508	609.6	
711	631.8	606.4	581	555.6	530.2	504.8	330.2	558.8	660.4	
762	682.6	657.2	631.8	606.4	581	555.6	355.6	609.6	711.2	
Pitch of the mounting plate mounting hole (B±0.3)		60.2	85.6	111	136.4	161.8	187.2	—	—	—
Permissible load (N/pair)		294	392	490	588	686	784	—	—	—

Note) The Permissible Load and Mass each indicate when used as a pair of 2 units.

Model number coding


FBL35F +356L #5

Model number

Model number of mounting plate

Overall rail length (mm)

Model FBL 48DR

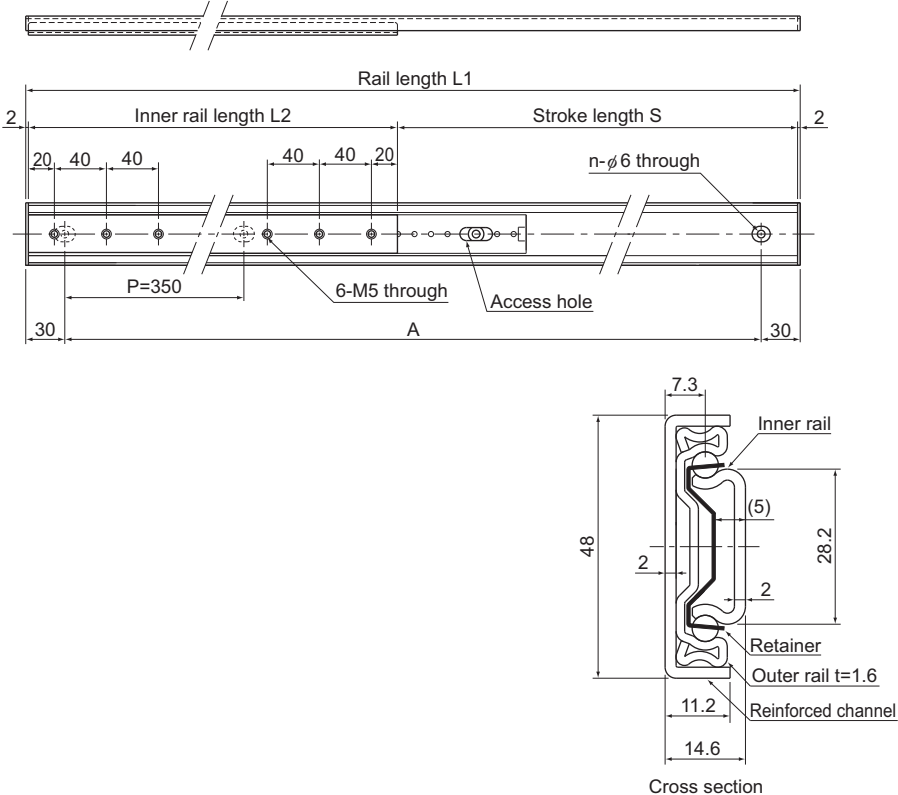

Unit: mm

Outer rail length L1	Inner rail length L2	Stroke length S	Mounting hole pitch A	No. of mounting holes n	Permissible load [N]	Mass [kg]
1110	496	610	P350×3	4	490	2.73
1110	696	410	P350×3	4	686	2.88
1460	496	960	P350×4	5	490	3.47
1460	696	760	P350×4	5	686	3.62
1810	696	1110	P350×5	6	686	4.36
2160	496	1660	P350×6	7	490	4.95
2160	696	1460	P350×6	7	686	5.1


Note1) Set the length of the mounting screws for the inner rail such that they do not touch the retainer.
Note2) Model FBL48DR differs from other slide rails by assuming use with a single rail. Therefore, the value is per single rail for permissible load.

Model number coding

FBL48DR +1810/696L

Model number Outer rail length Inner rail length
L1 (mm) L2 (mm)

Model E36RS

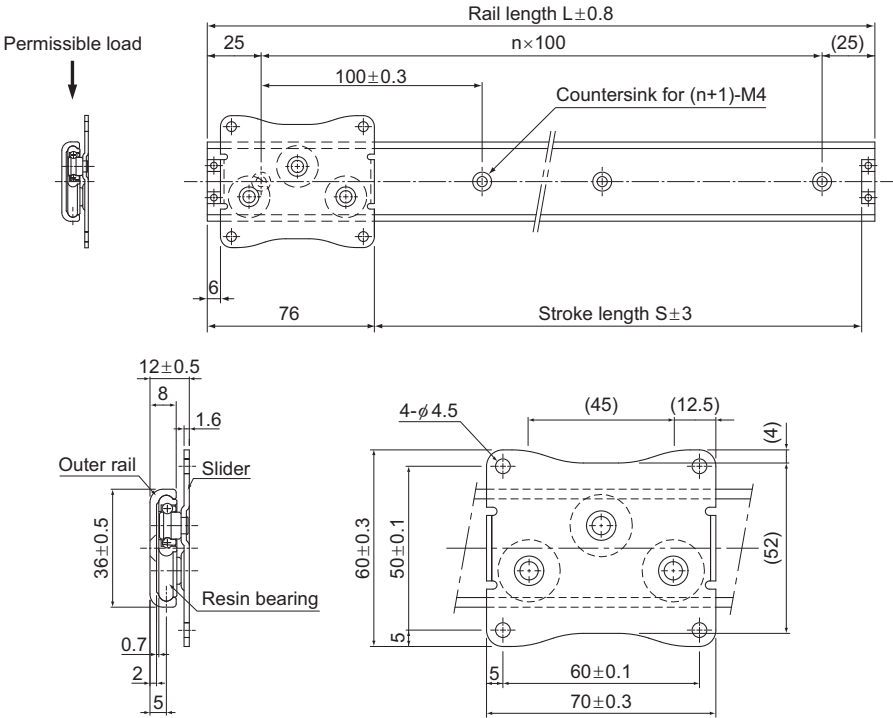

Unit: mm


Rail length L (±0.8)	Stroke length S (±3)	n	Mounting hole n+1	Permissible load ^(Note1) N	Mass g
150	68	1	2	40	104
250	168	2	3	40	130
350	268	3	4	40	156
450	368	4	5	40	182
550	468	5	6	40	207
650	568	6	7	40	233
750	668	7	8	40	259

Note) Model E36RS differs from other slide rails by assuming use with a single rail. Therefore, the value is per single rail for permissible load.

Model number coding

E36RS **+550L**
Model number Overall rail length (mm)

Model E15

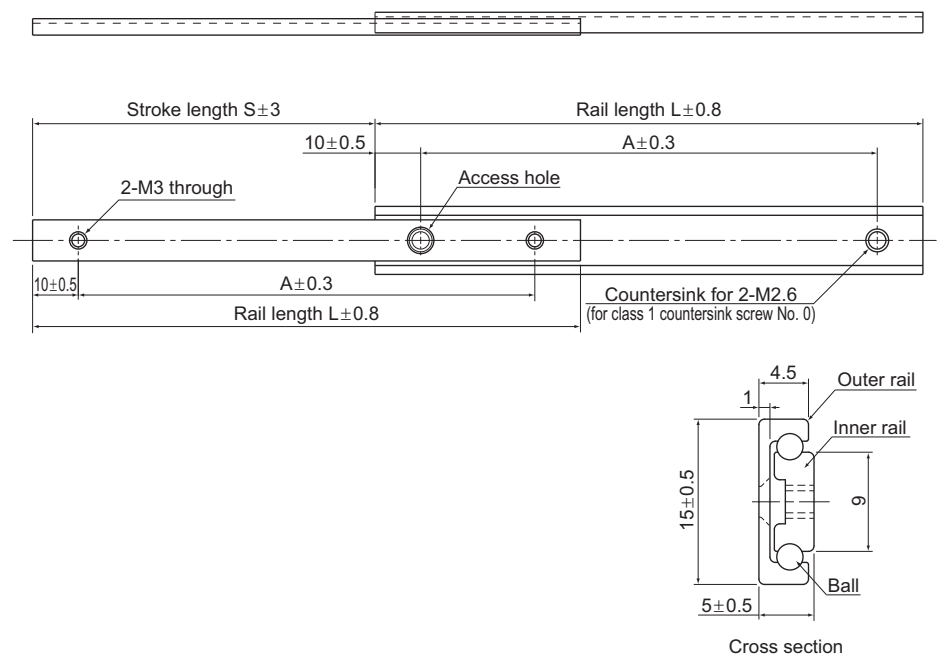

Unit: mm


Rail length L (± 0.8)	Stroke S (± 3)	Mounting hole dimensions A ± 0.3	Permissible load N/pair	Mass [g/pair]
50	20	30	5	15
80	45	60	8	24
100	60	80	10	30
120	75	100	10	36

Note) The Permissible Load and Mass each indicate when used as a pair of 2 units.

Model number coding

E15 **+100L**
Model number Overall rail length (mm)

Model E20

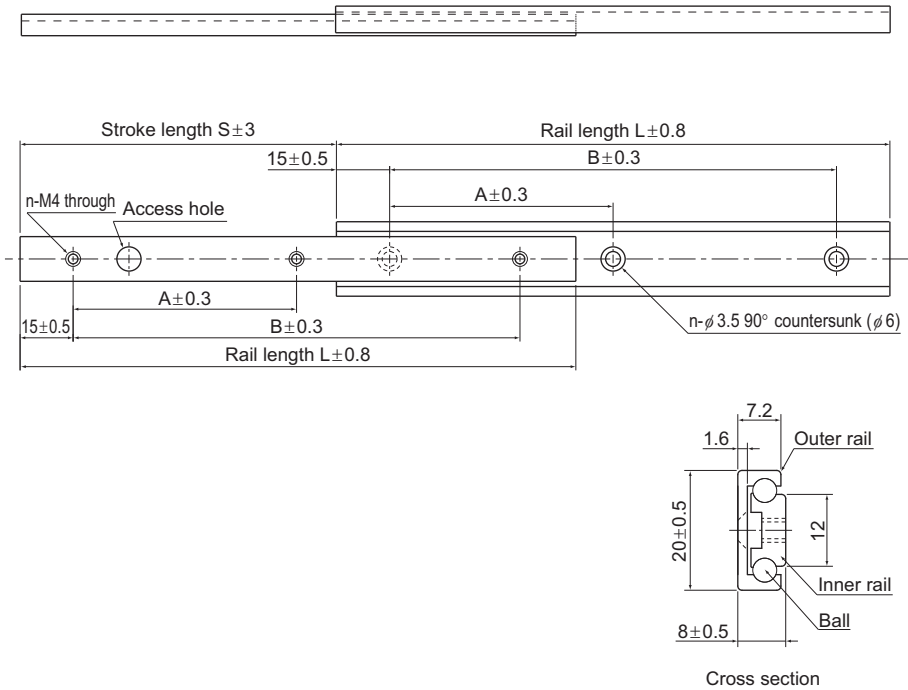

Unit: mm


Rail length L (± 0.8)	Stroke S (± 3)	Mounting hole dimensions			Permissible load N/pair	Mass [g/pair]
		A ± 0.3	B ± 0.3	n (pcs)		
80	45	50	—	2	20	50
100	60	70	—	2	30	62
150	85	60	120	3	80	98
200	120	85	170	3	140	131
300	180	135	270	3	145	197

Note) The Permissible Load and Mass each indicate when used as a pair of 2 units.

Model number coding

E20 **+150L**
Model number Overall rail length (mm)

Model D20

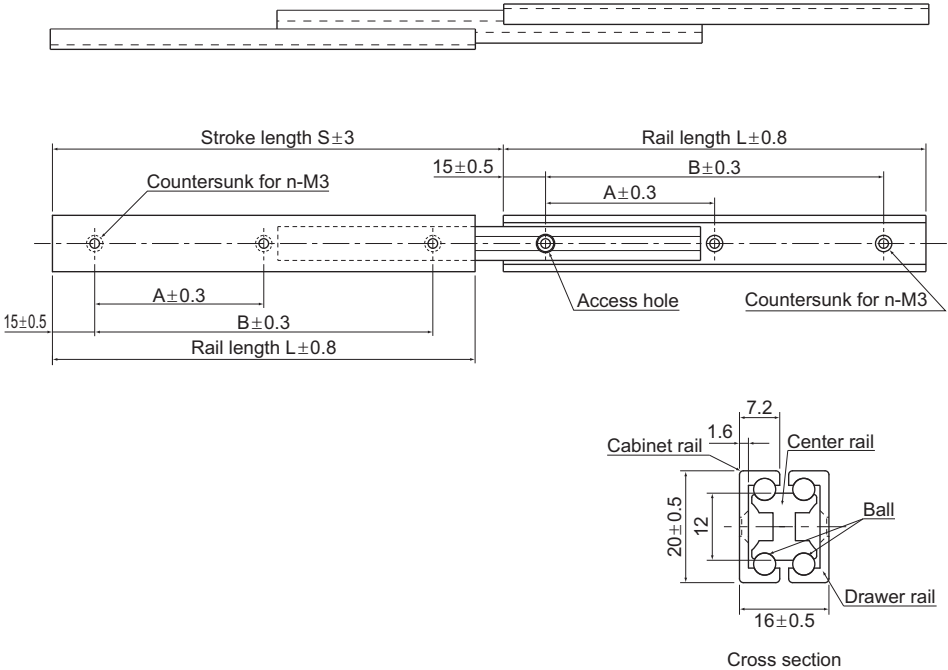

Unit: mm

Rail length L (± 0.8)	Stroke S (± 3)	Mounting hole dimensions			Permissible load N/pair	Mass [g/pair]
		A ± 0.3	B ± 0.3	n (pcs)		
80	80	50	—	2	20	94
100	100	70	—	2	30	118
150	160	60	120	3	80	179
200	223	85	170	3	140	241
300	345	135	270	3	145	364

Note) The Permissible Load and Mass each indicate when used as a pair of 2 units.

Model number coding

D20 +300L

Model number Overall rail length (mm)

[Permissible Load and Mounting Orientation]

For use other than with the mounting orientation shown in Fig.1, contact THK.

The permissible load of the Slide Rail indicates the load in the direction P_a that two rails can receive in the middle of the inner rail length at the maximum stroke.

The mounting orientation shown in Fig.2 is applicable to model FBL35B only.

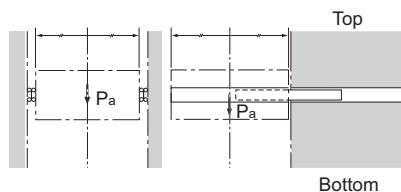


Fig.1

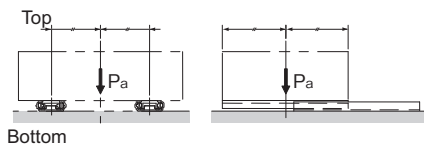


Fig.2

The mounting orientation of Fig.3 is applicable to model FBL35F.

The mounting orientation of Fig.4 must be used for model FBL48DR. To prevent a moment load from being applied, position the center of gravity of the door on the ball and cage center lines, and ensure that section A of the hanger is structured to allow free rotation.

The mounting orientation of Fig.5 is applicable to model E36RS.

Unlike other slide rails, model FBL48DR and model E36RS are used in a single rail configuration. Therefore, the load must be centered on the ball and the cage center line.

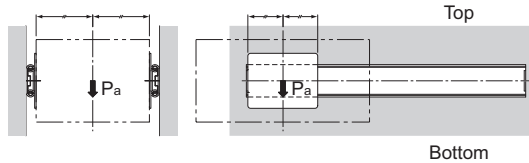


Fig.3

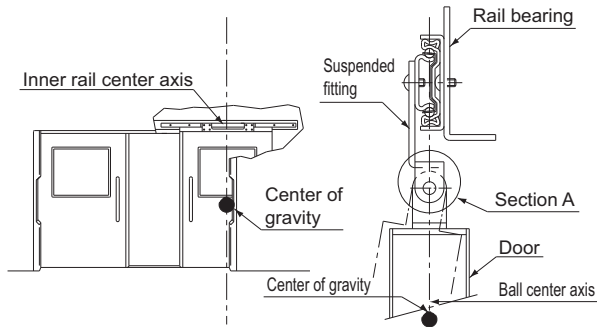


Fig.4

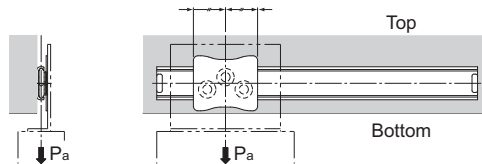


Fig.5

[Surface Treatment]

The surface of the Slide Rail is electro-galvanized (treated with trivalent chromate) as standard.

The aluminum slide rail of models E and D is white alumite-treated as standard. The slider of model E36RS is electro-galvanized (trivalent chromate treatment) and the rail is white alumite-treated as standard. For other surface treatments, contact THK.

Model Number Coding

Model number configurations differ depending on the model features. Refer to the corresponding sample model number configuration.

[Single slide/Double slide]

- Models FBL 27S, FBL 27S-P14, FBL 35S, FBL 35S-P13, FBL 35S-P14, FBL 35M, FBL 35J, FBL 35B, FBL 27D, FBL 35N, FBL 35N-P16, FBL 35G-P13, FBL 35G-P14, FBL 35D, FBL 51H, FBL 51H-P13, FBL 51H-P14, FBL 35K, FBL 56H, FBL 56H-P13 and FBL 56H-P14

FBL27S +300L

Model No. Overall rail length (in mm)

[Linear Type Slides]

- Model FBL35F

FBL35F +356L #5

Model No. Overall rail length (in mm) Model number of mounting plate

[Heavy Load Linear Type Slide]

- Model FBL48DR

FBL48DR +1810/696L

Model No. Outer rail length (in mm) Inner rail length (in mm)

[Linear Slide Wheel-type]

- Model E36RS

E36RS +550L

Model number Overall rail length (mm)

[Aluminum Alloy Slide Rail]

- Models E15, E20 and D20

E15 +100L

Model No. Overall rail length (in mm)

[Handling]

- (1) Tilting a Slide Rail may cause it to fall by its own weight.
- (2) Do not disassemble the parts. This will result in loss of functionality.
- (3) Take care not to drop or strike the Slide Rail. Doing so may cause injury or damage. Giving an impact to it could also cause damage to its function even if the product looks intact.
- (4) When handling the product, wear protective gloves, safety shoes, etc., as necessary to ensure safety.

[Precautions on Use]

- (1) When mounting the Slide Rail, use care to always keep both rails in parallel.
- (2) Prevent foreign material, such as cutting chips or coolant, from entering the product. Failure to do so may cause damage.
- (3) If the product is used in an environment where cutting chips, coolant, corrosive solvents, water, etc., may enter the product, use bellows, covers, etc., to prevent them from entering the product.
- (4) If foreign material such as cutting chips adheres to the product, replenish the lubricant after cleaning the product.
- (5) Avoid using the product at other than normal temperature, or using it in harsh conditions such as intensive reciprocations that generate frictional heat and environments with water or dust.
- (6) The durability of the Slide Rail varies depending on factors such as the drawing dimension, travel distance, mounting conditions and environment in addition to operating frequency. Take these factors into account when making a selection.
- (7) Note that the cage creep may occur if the slide rail is mounted vertically, subject to machine vibrations, etc. To correct the cage creep, fully open and fully close the slide rail. During this process, the motion will be less smooth than usual. If cage creep is inevitable, we recommend using Slide Packs, LM Guides, etc., which are infinite stroke linear motion systems.
- (8) If you replace an old slider or outer rail of your E36RS with a new one, the clearance and sliding resistance may substantially increase.
- (9) Do not use the supplied stopper as a mechanical stopper. This may damage the stopper due to impact.
- (10) Do not use undue force when fitting parts (pin, key, etc.) to the product. This may generate pressure marks on the raceway, leading to loss of functionality.
- (11) Insufficient rigidity or accuracy of mounting members causes the bearing load to concentrate on one point and the bearing performance will drop significantly. Accordingly, give sufficient consideration to the rigidity/accuracy of the housing and base and strength of the fixing bolts.

[Lubrication]

- (1) Lithium soap-based grease No. 2 is applied to the slide rail. Do not mix different lubricants. Even greases containing the same type of thickening agent may, if mixed, interact adversely due to disparate additives or other ingredients.
- (2) The consistency of grease changes according to the temperature. Take note that the slide resistance of the Slide Rail also changes as the consistency of grease changes.
- (3) After lubrication, the slide resistance of the Slide Rail may increase due to the agitation resistance of grease. Be sure to let the grease spread fully before use.

- (4) Excess grease may scatter immediately after lubrication, so wipe off scattered grease as necessary.
- (5) The properties of grease deteriorate and its lubrication performance drops over time, so grease must be checked and added properly according to the use frequency of the machine.
- (6) The greasing interval varies depending on the use condition and service environment. Set the final lubrication interval/amount based on the actual machine.

[Storage]

When storing the Slide Rail, enclose it in a package designated by THK and store it in a room in a horizontal orientation while avoiding high temperature, low temperature and high humidity.

After the product has been in storage for an extended period of time, lubricant inside may have deteriorated, so add new lubricant before use.

[Disposal]

Dispose of the product properly as industrial waste.